



# Challenge V and Wedge Belts


**Belt Mass** (kg/metre)

Section	Z	A	B	C	D
<b>V</b>	0.060	0.100	0.175	0.305	0.635
Section	SPZ	SPA	SPB	SPC	
<b>Wedge</b>	0.072	0.115	0.190	0.360	

**Working Temperature:**


-30°C to +70°C

**Classical 'V' Belts ISO 4184, BS 3790, DIN 2215, RMA IP20**

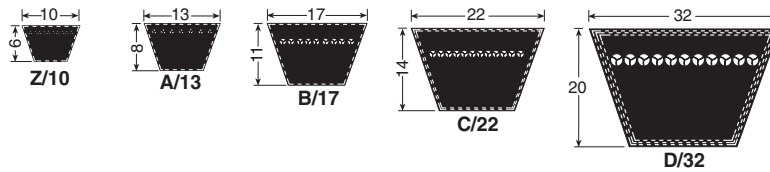

Section	Z	A	B	C	D
Top Width Nominal mm	10.0	13.0	17.0	22.0	32.0
Pitch Width mm	8.5	11.0	14.0	19.0	27.0
Section Height Nominal mm	6.0	8.0	11.0	14.0	19.0
Inside Length <i>Li</i> = <i>Lp</i> minus <i>x</i>	<i>x</i> = 22	<i>x</i> = 30	<i>x</i> = 40	<i>x</i> = 58	<i>x</i> = 75
Outside Length <i>La</i> = <i>Li</i> plus <i>y</i>	<i>y</i> = 50	<i>y</i> = 63	<i>y</i> = 100	<i>y</i> = 160	<i>y</i> = 280

**Wedge Belts ISO 4184, BS 3790, DIN 7753, RMA IP22**

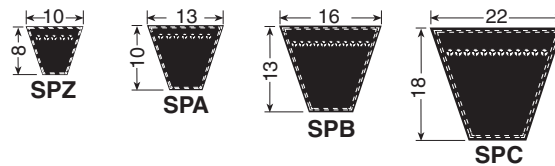

Section	SPZ	SPA	SPB	SPC
Top Width Nominal mm	10.0	13.0	16.0	22.0
Pitch Width mm	8.5	11.0	14.0	19.0
Section Height Nominal mm	8.0	10.0	14.0	18.0
Inside Length <i>Li</i> = <i>Lp</i> minus <i>x</i>	<i>x</i> = 27	<i>x</i> = 45	<i>x</i> = 60	<i>x</i> = 83
Outside Length <i>La</i> = <i>Li</i> plus <i>y</i>	<i>y</i> = 40	<i>y</i> = 63	<i>y</i> = 82	<i>y</i> = 113

*Lp* = Pitch Length  
*Li* = Inside Length  
*La* = Outside Length

Challenge belts are heat and oil resistant and have anti static properties and conform to ISO1813. The Challenge belt factory has ISO 9000 certification.

## Classical V-Belts

Z 10 x 6						A 13 x 8					
Imperial Li	Metric Lp	Metric Li	Imperial Li	Metric Lp	Metric Li	Imperial Li	Metric Lp	Metric Li	Imperial Li	Metric Lp	Metric Li
Z15	10 x 410	385	Z46.5	10 x 1210	1185	A18	13 x 490	460	A74	13 x 1920	1890
Z15.5	10 x 420	395	Z47	10 x 1220	1195	A19	13 x 520	490	A75	13 x 1940	1910
Z15.7	10 x 425	400	Z48	10 x 1240	1215	A20	13 x 540	510	A76	13 x 1960	1930
Z16.5	10 x 445	420	Z49	10 x 1270	1245	A21	13 x 570	540	A77	13 x 1990	1960
Z16.7	10 x 450	425	Z50	10 x 1290	1265	A22	13 x 590	560	A78	13 x 2020	1990
Z17.5	10 x 470	445	Z51	10 x 1320	1295	A23	13 x 620	590	A79	13 x 2050	2020
Z17.7	10 x 475	450	Z52	10 x 1340	1315	A24	13 x 650	620	A80	13 x 2070	2040
Z18	10 x 480	455	Z53	10 x 1370	1345	A25	13 x 670	640	A81	13 x 2090	2060
Z18.5	10 x 495	470	Z54	10 x 1390	1365	A26	13 x 700	670	A82	13 x 2120	2090
Z19	10 x 510	485	Z55	10 x 1420	1395	A27	13 x 720	690	A83	13 x 2140	2110
Z19.5	10 x 520	495	Z56	10 x 1450	1425	A28	13 x 750	720	A84	13 x 2170	2140
Z20	10 x 530	505	Z57	10 x 1470	1445	A29	13 x 770	740	A85	13 x 2190	2160
Z20.5	10 x 545	520	Z58	10 x 1500	1475	A30	13 x 800	770	A86	13 x 2220	2190
Z21	10 x 560	535	Z59	10 x 1520	1495	A31	13 x 820	790	A87	13 x 2240	2210
Z21.7	10 x 575	550	Z60	10 x 1550	1525	A32	13 x 850	820	A88	13 x 2270	2240
Z22	10 x 580	555	Z62	10 x 1600	1575	A33	13 x 870	840	A89	13 x 2300	2270
Z22.2	10 x 585	560	Z63	10 x 1620	1595	A34	13 x 900	870	A90	13 x 2320	2290
Z23	10 x 610	585	Z64	10 x 1650	1625	A35	13 x 920	890	A91	13 x 2350	2320
Z23.5	10 x 620	595	Z68	10 x 1750	1725	A36	13 x 950	920	A92	13 x 2370	2340
Z24	10 x 630	605	Z75	10 x 1920	1895	A37	13 x 980	950	A93	13 x 2400	2370
Z24.7	10 x 655	630	Z78	10 x 2000	1975	A38	13 x 1000	970	A94	13 x 2420	2390
Z25	10 x 660	635				A39	13 x 1030	1000	A95	13 x 2450	2420
Z25.7	10 x 675	655				A40	13 x 1050	1020	A96	13 x 2470	2440
Z26	10 x 680	660				A41	13 x 1080	1050	A97	13 x 2500	2470
Z26.5	10 x 700	675				A42	13 x 1100	1070	A98	13 x 2530	2500
Z27	10 x 710	685				A43	13 x 1130	1100	A99	13 x 2550	2520
Z28	10 x 730	705				A44	13 x 1150	1120	A100	13 x 2580	2550
Z29	10 x 760	735				A45	13 x 1180	1150	A102	13 x 2630	2600
Z29.5	10 x 770	745				A46	13 x 1200	1170	A103	13 x 2650	2620
Z30	10 x 780	755				A47	13 x 1230	1200	A104	13 x 2680	2650
Z30.7	10 x 805	780				A48	13 x 1250	1220	A105	13 x 2700	2670
Z31	10 x 810	785				A49	13 x 1280	1250	A106	13 x 2730	2700
Z31.5	10 x 820	795				A50	13 x 1310	1280	A107	13 x 2750	2720
Z32	10 x 840	815				A51	13 x 1330	1300	A108	13 x 2780	2750
Z33	10 x 860	835				A52	13 x 1360	1330	A109	13 x 2800	2770
Z33.7	10 x 880	855				A53	13 x 1380	1350	A110	13 x 2830	2800
Z34	10 x 890	865				A54	13 x 1410	1380	A112	13 x 2880	2850
Z35	10 x 910	885				A55	13 x 1430	1400	A113	13 x 2910	2880
Z35.5	10 x 930	905				A56	13 x 1460	1430	A115	13 x 2960	2930
Z36	10 x 940	915				A57	13 x 1480	1450	A116	13 x 2980	2950
Z36.5	10 x 950	925				A58	13 x 1510	1480	A117	13 x 3010	2980
Z37	10 x 960	935				A59	13 x 1530	1500	A118	13 x 3030	3000
Z37.5	10 x 980	945				A60	13 x 1560	1530	A120	13 x 3080	3050
Z38	10 x 990	955				A61	13 x 1580	1550	A124	13 x 3190	3160
Z39	10 x 1010	985				A62	13 x 1610	1580	A125	13 x 3200	3170
Z39.5	10 x 1030	1005				A63	13 x 1640	1610	A128	13 x 3290	3260
Z40	10 x 1040	1015				A64	13 x 1660	1630	A130	13 x 3340	3310
Z40.5	10 x 1050	1025				A65	13 x 1690	1660	A132	13 x 3390	3360
Z41	10 x 1060	1035				A66	13 x 1710	1680	A134	13 x 3440	3410
Z42	10 x 1090	1065				A67	13 x 1740	1710	A136	13 x 3490	3460
Z42.5	10 x 1100	1075				A68	13 x 1760	1730	A138	13 x 3540	3510
Z43	10 x 1120	1095				A69	13 x 1790	1760	A140	13 x 3590	3560
Z44	10 x 1140	1115				A70	13 x 1810	1780	A144	13 x 3690	3660
Z45	10 x 1170	1145				A71	13 x 1840	1810	A154	13 x 3950	3920
Z45.5	10 x 1180	1155				A72	13 x 1860	1830	A158	13 x 4050	4020
Z46	10 x 1190	1165				A73	13 x 1890	1860	A173	13 x 4430	4400

# Classical V-Belts

B 17 x 11								
Imperial Li	Metric Lp	Metric Li	Imperial Li	Metric Lp	Metric Li	Imperial Li	Metric Lp	Metric Li
B22	17 x 600	560	B79	17 x 2050	2010	B148	17 x 3800	3760
B24	17 x 650	610	B80	17 x 2080	2040	B150	17 x 3850	3810
B25	17 x 670	630	B81	17 x 2100	2060	B152	17 x 3900	3860
B26	17 x 700	660	B82	17 x 2130	2090	B154	17 x 3950	3910
B28	17 x 750	710	B83	17 x 2150	2110	B155	17 x 3980	3940
B29	17 x 780	740	B84	17 x 2180	2140	B158	17 x 4060	4020
B30	17 x 810	770	B85	17 x 2200	2160	B160	17 x 4110	4050
B31	17 x 830	790	B86	17 x 2230	2190	B162	17 x 4160	4120
B32	17 x 860	820	B87	17 x 2250	2210	B164	17 x 4210	4170
B33	17 x 880	840	B88	17 x 2280	2240	B166	17 x 4260	4220
B34	17 x 910	870	B89	17 x 2300	2260	B168	17 x 4310	4270
B35	17 x 930	890	B90	17 x 2330	2290	B173	17 x 4440	4400
B36	17 x 960	920	B91	17 x 2350	2310	B180	17 x 4620	4580
B37	17 x 980	940	B92	17 x 2380	2340	B184	17 x 4720	4670
B38	17 x 1010	970	B93	17 x 2410	2370	B185	17 x 4740	4700
B39	17 x 1030	990	B94	17 x 2420	2380	B187	17 x 4790	4750
B40	17 x 1060	1020	B95	17 x 2460	2420	B193	17 x 4940	4900
B41	17 x 1080	1040	B96	17 x 2480	2440	B194	17 x 4970	4930
B42	17 x 1110	1070	B97	17 x 2510	2470	B195	17 x 5000	4960
B43	17 x 1130	1090	B98	17 x 2530	2490	B197	17 x 5050	5010
B44	17 x 1160	1120	B99	17 x 2560	2520	B204	17 x 5220	5180
B45	17 x 1180	1140	B100	17 x 2580	2540	B210	17 x 5380	5340
B46	17 x 1210	1170	B101	17 x 2610	2570	B215	17 x 5510	5470
B47	17 x 1240	1200	B102	17 x 2630	2590	B220	17 x 5630	5590
B48	17 x 1260	1220	B103	17 x 2660	2620	B222	17 x 5680	5640
B49	17 x 1290	1250	B104	17 x 2680	2640	B225	17 x 5760	5720
B50	17 x 1310	1270	B105	17 x 2710	2670	B238	17 x 6090	6050
B51	17 x 1340	1300	B106	17 x 2740	2700	B240	17 x 6120	6080
B52	17 x 1370	1330	B107	17 x 2760	2720	B255	17 x 6500	6460
B53	17 x 1390	1350	B108	17 x 2790	2750	B256	17 x 6550	6490
B54	17 x 1410	1370	B110	17 x 2840	2800	B264	17 x 6750	6710
B55	17 x 1440	1400	B111	17 x 2870	2830	B268	17 x 6850	6810
B56	17 x 1470	1430	B112	17 x 2890	2850	B298	17 x 7610	7570
B57	17 x 1490	1450	B113	17 x 2920	2880	B358	17 x 9140	9100
B58	17 x 1520	1480	B114	17 x 2940	2900			
B59	17 x 1540	1500	B115	17 x 2960	2920			
B60	17 x 1570	1530	B116	17 x 2990	2950			
B61	17 x 1590	1550	B117	17 x 3020	2980			
B62	17 x 1620	1580	B118	17 x 3040	3000			
B63	17 x 1640	1600	B120	17 x 3090	3050			
B64	17 x 1670	1630	B122	17 x 3140	3100			
B65	17 x 1690	1650	B124	17 x 3190	3150			
B66	17 x 1720	1680	B125	17 x 3220	3160			
B66.5	17 x 1730	1690	B126	17 x 3240	3200			
B67	17 x 1740	1700	B128	17 x 3290	3250			
B68	17 x 1770	1730	B130	17 x 3350	3310			
B69	17 x 1800	1760	B131	17 x 3380	3340			
B70	17 x 1820	1780	B132	17 x 3400	3360			
B71	17 x 1850	1810	B134	17 x 3450	3410			
B72	17 x 1870	1830	B135	17 x 3480	3440			
B73	17 x 1900	1860	B136	17 x 3500	3460			
B74	17 x 1920	1880	B138	17 x 3550	3510			
B75	17 x 1950	1910	B140	17 x 3600	3560			
B76	17 x 1970	1930	B142	17 x 3650	3610			
B77	17 x 2000	1960	B144	17 x 3700	3660			
B78	17 x 2020	1980	B146	17 x 3750	3710			

All dimensions in millimetres unless otherwise stated. Every effort has been taken to ensure that the data listed in this catalogue is correct. Challenge accepts no liability for any inaccuracies or damage caused.

## Classical V-Belts

### C 22 x 14

Imperial Li	Metric Lp	Metric Li	Imperial Li	Metric Lp	Metric Li	Imperial Li	Metric Lp	Metric Li
C40	22 x 1070	1012	C111	22 x 2880	2822	C268	22 x 6860	6802
C42	22 x 1120	1062	C112	22 x 2900	2842	C270	22 x 6910	6852
C43	22 x 1150	1092	C114	22 x 2950	2892	C285	22 x 7290	7232
C44	22 x 1170	1112	C115	22 x 2980	2922	C298	22 x 7630	7572
C45	22 x 1200	1142	C116	22 x 3000	2942	C300	22 x 7670	7612
C46	22 x 1220	1162	C118	22 x 3050	2992	C314	22 x 8030	7972
C48	22 x 1270	1212	C119	22 x 3080	3022	C330	22 x 8440	8382
C50	22 x 1320	1262	C120	22 x 3100	3042	C345	22 x 8820	8762
C51	22 x 1350	1292	C122	22 x 3160	3102	C360	22 x 9200	9142
C52	22 x 1380	1322	C123	22 x 3190	3132	C420	22 x 10690	10632
C53	22 x 1400	1342	C124	22 x 3210	3152			
C54	22 x 1430	1372	C125	22 x 3240	3182			
C55	22 x 1450	1392	C128	22 x 3310	3252			
C56	22 x 1480	1422	C130	22 x 3360	3302			
C57	22 x 1510	1452	C131	22 x 3390	3332			
C58	22 x 1530	1472	C132	22 x 3410	3352			
C59	22 x 1560	1502	C133	22 x 3430	3372			
C60	22 x 1580	1522	C134	22 x 3460	3402			
C61	22 x 1610	1552	C136	22 x 3510	3452			
C62	22 x 1630	1572	C138	22 x 3560	3502			
C63	22 x 1660	1602	C140	22 x 3610	3552			
C64	22 x 1680	1622	C141	22 x 3640	3582			
C65	22 x 1700	1642	C142	22 x 3660	3602			
C67	22 x 1760	1702	C143	22 x 3690	3632			
C68	22 x 1780	1722	C144	22 x 3710	3652			
C69	22 x 1810	1752	C145	22 x 3740	3682			
C70	22 x 1830	1772	C146	22 x 3760	3702			
C71	22 x 1860	1802	C148	22 x 3820	3762			
C72	22 x 1880	1822	C150	22 x 3870	3812			
C73	22 x 1910	1852	C152	22 x 3920	3862			
C74	22 x 1930	1872	C154	22 x 3970	3912			
C75	22 x 1960	1902	C156	22 x 4020	3962			
C76	22 x 1980	1922	C158	22 x 4070	4012			
C77	22 x 2010	1952	C159	22 x 4100	4042			
C78	22 x 2040	1982	C160	22 x 4120	4062			
C79	22 x 2060	2002	C162	22 x 4170	4112			
C80	22 x 2090	2032	C164	22 x 4220	4162			
C81	22 x 2110	2052	C166	22 x 4270	4212			
C82	22 x 2140	2082	C167	22 x 4300	4242			
C83	22 x 2160	2102	C168	22 x 4320	4262			
C84	22 x 2190	2132	C170	22 x 4370	4312			
C85	22 x 2210	2152	C173	22 x 4450	4392			
C86	22 x 2230	2172	C175	22 x 4500	4442			
C87	22 x 2270	2212	C180	22 x 4630	4572			
C88	22 x 2290	2232	C182	22 x 4680	4622			
C89	22 x 2320	2262	C184	22 x 4730	4672			
C90	22 x 2340	2282	C185	22 x 4750	4692			
C91	22 x 2370	2312	C190	22 x 4880	4822			
C92	22 x 2390	2332	C195	22 x 5010	4952			
C93	22 x 2420	2362	C200	22 x 5140	5082			
C94	22 x 2440	2382	C204	22 x 5240	5182			
C95	22 x 2470	2412	C208	22 x 5340	5282			
C96	22 x 2490	2432	C210	22 x 5390	5332			
C97	22 x 2520	2462	C214	22 x 5480	5422			
C98	22 x 2550	2492	C220	22 x 5640	5582			
C99	22 x 2580	2522	C224	22 x 5740	5682			
C100	22 x 2600	2542	C225	22 x 5770	5712			
C101	22 x 2630	2572	C228	22 x 5850	5792			
C102	22 x 2650	2592	C238	22 x 6100	6042			
C104	22 x 2700	2642	C240	22 x 6150	6092			
C105	22 x 2720	2662	C248	22 x 6360	6302			
C106	22 x 2750	2692	C250	22 x 6410	6352			
C108	22 x 2800	2742	C255	22 x 6540	6482			
C110	22 x 2850	2792	C256	22 x 6570	6512			

### D 32 x 20

Imperial Li	Metric Lp	Metric Li	Imperial Li	Metric Lp	Metric Li
D90	32 x 2350	2275	D228	32 x 5870	5795
D97	32 x 2530	2455	D230	32 x 5920	5845
D98	32 x 2570	2495	D232	32 x 5980	5905
D101	32 x 2640	2565	D238	32 x 6130	6055
D102	32 x 2660	2585	D240	32 x 6180	6105
D105	32 x 2750	2675	D248	32 x 6380	6305
D108	32 x 2830	2755	D250	32 x 6430	6355
D109	32 x 2850	2775	D255	32 x 6560	6485
D110	32 x 2880	2805	D270	32 x 6940	6865
D112	32 x 2930	2855	D280	32 x 7190	7115
D113	32 x 2960	2885	D285	32 x 7320	7245
D120	32 x 3130	3055	D298	32 x 7650	7575
D124	32 x 3230	3155	D300	32 x 7700	7625
D128	32 x 3330	3255	D314	32 x 8060	7985
D130	32 x 3380	3305	D315	32 x 8090	8015
D132	32 x 3430	3355	D328	32 x 8410	8335
D136	32 x 3540	3465	D330	32 x 8460	8385
D137	32 x 3560	3485	D340	32 x 8710	8635
D140	32 x 3640	3565	D358	32 x 9170	9095
D144	32 x 3740	3665	D360	32 x 9220	9145
D148	32 x 3840	3765	D380	32 x 9730	9655
D150	32 x 3890	3815	D394	32 x 10080	10005
D152	32 x 3940	3865	D418	32 x 10700	10625
D154	32 x 3990	3915	D420	32 x 10740	10665
D156	32 x 4040	3965	D440	32 x 11250	11175
D158	32 x 4090	4015	D441	32 x 11270	11195
D162	32 x 4200	4125	D450	32 x 11500	11425
D166	32 x 4300	4225	D480	32 x 12260	12185
D170	32 x 4400	4325	D525	32 x 13410	13335
D173	32 x 4480	4405	D540	32 x 13790	13715
D177	32 x 4580	4505	D564	32 x 14400	14325
D180	32 x 4650	4575	D600	32 x 15310	15235
D185	32 x 4780	4705			
D187	32 x 4830	4755			
D191	32 x 4930	4855			
D195	32 x 5030	4955			
D204	32 x 5260	5185			
D210	32 x 5420	5345			
D220	32 x 5660	5585			
D225	32 x 5800	5725			

# Classical CRE V-Belts

## AX 13 x 8

Imperial Li	Metric Lp	Metric Li	Imperial Li	Metric Lp	Metric Li
AX16	13 x 470	440	AX77	13 x 1990	1960
AX18	13 x 490	460	AX78	13 x 2020	1990
AX19	13 x 520	490	AX79	13 x 2050	2020
AX20	13 x 540	510	AX80	13 x 2070	2040
AX21	13 x 570	540	AX81	13 x 2090	2060
AX22	13 x 590	560	AX82	13 x 2120	2090
AX23	13 x 620	590	AX83	13 x 2140	2110
AX24	13 x 650	620	AX84	13 x 2170	2140
AX25	13 x 670	640	AX85	13 x 2190	2160
AX26	13 x 700	670	AX86	13 x 2220	2190
AX27	13 x 720	690	AX87	13 x 2240	2210
AX28	13 x 750	720	AX88	13 x 2270	2240
AX29	13 x 770	740	AX89	13 x 2300	2270
AX30	13 x 800	770	AX90	13 x 2320	2290
AX31	13 x 820	790	AX91	13 x 2350	2320
AX32	13 x 850	820	AX92	13 x 2370	2340
AX33	13 x 870	840	AX93	13 x 2400	2370
AX34	13 x 900	870	AX94	13 x 2420	2390
AX35	13 x 920	890	AX95	13 x 2450	2420
AX36	13 x 950	920	AX96	13 x 2470	2440
AX37	13 x 980	950	AX97	13 x 2500	2470
AX38	13 x 1000	970	AX98	13 x 2530	2500
AX39	13 x 1030	1000			
AX40	13 x 1050	1020			
AX41	13 x 1080	1050			
AX42	13 x 1100	1070			
AX43	13 x 1130	1100			
AX44	13 x 1150	1120			
AX45	13 x 1180	1150			
AX46	13 x 1200	1170			
AX47	13 x 1230	1200			
AX48	13 x 1250	1220			
AX49	13 x 1280	1250			
AX50	13 x 1310	1280			
AX51	13 x 1330	1300			
AX52	13 x 1360	1330			
AX53	13 x 1380	1350			
AX54	13 x 1410	1380			
AX55	13 x 1430	1400			
AX56	13 x 1460	1430			
AX57	13 x 1480	1450			
AX58	13 x 1510	1480			
AX59	13 x 1530	1500			
AX60	13 x 1560	1530			
AX61	13 x 1580	1550			
AX62	13 x 1610	1580			
AX63	13 x 1640	1610			
AX64	13 x 1660	1630			
AX65	13 x 1690	1660			
AX66	13 x 1710	1680			
AX67	13 x 1740	1710			
AX68	13 x 1760	1730			
AX69	13 x 1790	1760			
AX70	13 x 1810	1780			
AX71	13 x 1840	1810			
AX72	13 x 1860	1830			
AX73	13 x 1890	1860			
AX74	13 x 1920	1890			
AX75	13 x 1940	1910			
AX76	13 x 1960	1930			

## BX 17 x 11

Imperial Li	Metric Lp	Metric Li	Imperial Li	Metric Lp	Metric Li
BX22	17 x 600	560	BX86	17 x 2230	2190
BX24	17 x 650	610	BX87	17 x 2250	2210
BX26	17 x 700	660	BX88	17 x 2280	2240
BX28	17 x 750	710	BX89	17 x 2300	2260
BX30	17 x 810	770	BX90	17 x 2330	2290
BX31	17 x 830	790	BX91	17 x 2350	2310
BX32	17 x 860	820	BX92	17 x 2380	2340
BX33	17 x 880	840	BX93	17 x 2410	2370
BX34	17 x 910	870	BX94	17 x 2420	2380
BX35	17 x 930	890			
BX36	17 x 960	920			
BX37	17 x 980	940			
BX38	17 x 1010	970			
BX39	17 x 1030	990			
BX40	17 x 1060	1020			
BX41	17 x 1080	1040			
BX42	17 x 1110	1070			
BX43	17 x 1130	1090			
BX44	17 x 1160	1120			
BX45	17 x 1180	1140			
BX46	17 x 1210	1170			
BX47	17 x 1240	1200			
BX48	17 x 1260	1220			
BX49	17 x 1290	1250			
BX50	17 x 1310	1270			
BX51	17 x 1340	1300			
BX52	17 x 1370	1330			
BX53	17 x 1390	1350			
BX54	17 x 1410	1370			
BX55	17 x 1440	1400			
BX56	17 x 1470	1430			
BX57	17 x 1490	1450			
BX58	17 x 1520	1480			
BX59	17 x 1540	1500			
BX60	17 x 1570	1530			
BX61	17 x 1590	1550			
BX62	17 x 1620	1580			
BX63	17 x 1640	1600			
BX64	17 x 1670	1630			
BX65	17 x 1690	1650			
BX66	17 x 1720	1680			
BX67	17 x 1740	1700			
BX68	17 x 1770	1730			
BX69	17 x 1800	1760			
BX70	17 x 1820	1780			
BX71	17 x 1850	1810			
BX72	17 x 1870	1830			
BX73	17 x 1900	1860			
BX74	17 x 1920	1880			
BX75	17 x 1950	1910			
BX76	17 x 1970	1930			
BX77	17 x 2000	1960			
BX78	17 x 2020	1980			
BX79	17 x 2050	2010			
BX80	17 x 2080	2040			
BX81	17 x 2100	2060			
BX82	17 x 2130	2090			
BX83	17 x 2150	2110			
BX84	17 x 2180	2140			
BX85	17 x 2200	2160			

All dimensions in millimetres unless otherwise stated. Every effort has been taken to ensure that the data listed in this catalogue is correct. Challenge accepts no liability for any inaccuracies or damage caused.



## Wedge Belts

SPZ 10N						SPA 13N		
Metric Lp	RMA Equivalent	Metric Lp	RMA Equivalent	Metric Lp	RMA Equivalent	Metric Lp	Metric Lp	Metric Lp
512		1270	3V500	2650		632	1482	3150
530		1287		2690	3V1060	657	1500	3182
545		1300		2800		682	1507	3350
562		1312		2840	3V1120	707	1532	3450
580		1320	3V520	2990		732	1550	3550
612		1337		3000	3V1180	750	1557	3750
630	3V250	1340	3V530	3150		757	1582	4000
637		1347		3170	3V1250	782	1600	4250
662	3V260	1362		3350	3V1320	800	1607	4500
670	3V265	1387		3550	3V1400	807	1632	
687		1400		3810		825	1650	
710	3V280	1412				832	1657	
737		1420	3V560			850	1682	
750		1437				857	1700	
760	3V300	1462				875	1707	
762		1470	3V580			882	1732	
772		1487				900	1750	
787		1500				907	1757	
797		1512				925	1782	
800	3V315	1520	3V600			932	1800	
812		1537				950	1807	
825		1550				957	1832	
837		1560	3V617			975	1857	
850	3V335	1562				982	1882	
862		1587				1000	1900	
875		1600	3V630			1007	1937	
887	3V350	1612				1032	1950	
900	3V355	1637				1057	1957	
912		1650	3V650			1060	1982	
925		1662				1082	2000	
937		1687				1090	2032	
940	3V370	1700	3V670			1107	2057	
950	3V375	1737				1120	2060	
962		1750				1132	2120	
975		1762				1150	2132	
987		1787				1157	2157	
1000		1800	3V710			1180	2182	
1010	3V400	1837				1182	2207	
1012		1850	3V730			1200	2240	
1020		1862				1207	2282	
1037		1887				1220	2300	
1060		1900	3V750			1232	2360	
1062		1937				1250	2430	
1080	3V425	1950				1257	2460	
1087		1962				1272	2482	
1090		2000				1280	2487	
1100		2030	3V800			1282	2500	
1112		2087				1300	2580	
1120		2120				1307	2607	
1137		2137				1320	2650	
1140	3V450	2150				1332	2720	
1162		2160	3V850			1357	2782	
1180		2187				1360	2800	
1187		2240				1362	2832	
1200	3V475	2280	3V900			1382	2847	
1212		2300				1400	2882	
1222		2360				1407	2900	
1237		2410	3V950			1432	2932	
1250		2500				1450	2982	
1262		2540	3V1000			1457	3000	

# Wedge Belts

SPB 16N				SPC 22N	
Metric Lp	RMA Equivalent	Metric Lp	RMA Equivalent	Metric Lp	
1250		4250		2000	
1260	5V500	4310	5V1700	2120	
1320		4500		2240	
1340	5V530	4560	5V1800	2360	
1360		4710		2425	
1400		4750		2450	
1410	5V560	4820	5V1900	2500	
1450		5000		2650	
1500	5V600	5070	5V2000	2800	
1550		5300		3000	
1590		5380	5V2120	3150	
1600	5V630	5600		3350	
1650		5680	5V2240	3550	
1700		5990		3750	
1750		6000	5V2360	4000	
1800	5V710	6300		4100	
1850		6340	5V2500	4250	
1900	5V750	6700		4500	
1950		7100	5V2800	4750	
2000		7500		5000	
2020	5V800	8000	5V3150	5300	
2060				5600	
2120				6000	
2150	5V850			6300	
2200				6700	
2240				7000	
2280	5V900			7100	
2300				7500	
2350				7750	
2360				8000	
2400				8500	
2410	5V950			9000	
2450				9500	
2500				10000	
2530	5V1000				
2550					
2600					
2650					
2680	5V1060				
2700					
2800					
2840	5V1120				
2990					
3000	5V1180				
3150					
3170	5V1250				
3270					
3320					
3340					
3350	5V1320				
3500					
3550	5V1400				
3600					
3650					
3750					
3800	5V1500				
3900					
4000					
4060	5V1600				
4100					

**Equivalent belt designations are:**

- 10N (SPZ) is interchangeable with 3V and 9N
- 16N (SPB) is interchangeable with 5V and 15N
- 25N (8V) is interchangeable with SPP

These do not apply to Banded belts



## Wedge Belts

SPZX		SPAX		SPBX	SPCX
Metric Lp	Metric Lp	Metric Lp	Metric Lp	Metric Lp	Metric Lp
587	1202	690	1500	1000	2240
600	1212	732	1507	1060	2360
612	1220	750	1522	1120	2650
630	1230	757	1532	1180	2800
637	1237	775	1550	1250	
660	1250	782	1557	1320	
662	1262	800	1582	1340	
670	1270	807	1600	1400	
687	1280	825	1607	1450	
690	1287	832	1632	1500	
710	1300	850	1650	1600	
722	1312	857	1682	1700	
730	1320	875	1700	1750	
737	1337	882	1732	1800	
750	1340	900	1750	1850	
760	1360	907	1757	1900	
762	1362	925	1782	1950	
772	1387	932	1800	1970	
775	1400	950	1832	2000	
787	1412	957	1850	2020	
800	1420	969	1900	2120	
812	1437	975	1950	2240	
817	1450	982	1957	2280	
825	1462	1000	1982	2360	
837	1470	1007	2000	2400	
850	1487	1030	2032	2410	
862	1500	1032	2057	2500	
875	1512	1060	2060	2650	
887	1520	1082	2120	2800	
900	1537	1090	2160		
912	1550	1107	2180		
917	1560	1120	2240		
925	1562	1132	2282		
937	1587	1142	2300		
950	1600	1150	2360		
962	1612	1157			
975	1650	1172			
987	1662	1180			
1000	1700	1207			
1010	1750	1220			
1012	1762	1232			
1030	1800	1250			
1037	1850	1257			
1040	1900	1272			
1047	1950	1280			
1057	2000	1282			
1060	2030	1307			
1077	2040	1320			
1080	2080	1332			
1087	2120	1357			
1110	2160	1360			
1112	2200	1380			
1120	2240	1382			
1137	2280	1400			
1140	2360	1420			
1150		1432			
1162		1450			
1180		1457			
1187		1462			
1200		1482			

# Selection Procedure

## Wedge belt selection procedure

### 1) Service factor

Refer to table 1 on page 142 and select a service factor appropriate to the drive conditions.

### 2) Design power

Multiply the machine absorbed power (kW) by the service factor to obtain the design power.

If the machine absorbed power is not known, use the prime mover power (kW).

The design power is used as a basis for selecting the drive.

### 3) Belt section

Refer to table 2 on page 143.

Note the intersection of the speed of the faster shaft (on the horizontal scale) and the design power (on the vertical scale).

The point of intersection indicates the preferable belt section.

### 4) Speed ratio

Divide the rotational speed of the high speed shaft by that of the low speed shaft to obtain the speed ratio.

### 5) Pulley pitch diameters

For the chosen section from step 3), refer to table 3 speed ratios on pages 144 and 145, then select two pulleys\* that match closely the required speed ratio from step 4).

\*Note : the use of small pulleys can overload motor bearings. It is preferable to use larger driving pulleys if possible.

Most applications will allow for a driven speed tolerance of  $\pm 2\%$ .

### 6) Belt length

Calculate the required pitch length of belt required from the following formula :-

$$L = 2.C + \frac{(D-d)^2}{4.C} + 1.57.(D+d)$$

Where L = pitch length of belt  
C = centre distance required in mm  
d = small pulley pitch diameter in mm  
D = large pulley pitch diameter in mm

From the list of belts (pages 137, 138), choose a belt nearest to the calculated value.

When a centre distance value is not specified, choose one equal to or exceeding the sum of the pulley diameters.

### 7) Centre distance

To obtain the approximate actual centre distance, divide the difference between the chosen belt and the belt length required from step 6) by 2.

If the chosen belt is longer, add the value to the required centre distance or if it is shorter, deduct the value from the required centre distance.

This simple method is usually accurate to within 2 millimetres.

If a more accurate centre distance value is required, use the formulae below :-

$$C = A + \sqrt{A^2 - B}$$

$$\text{Where } A = \frac{L}{4} - 0.3935.(D+d)$$

$$\text{and } B = \frac{(D-d)^2}{8}$$

### 8) Power per belt (kW)

Refer to table 4 power ratings (pages 146, 147) for the section of belt chosen.

Read across the top row to the small pulley pitch diameter chosen. Then read down to the speed of the faster shaft to obtain the power per belt in kW.

If necessary, interpolate for a more accurate value.

### 9) Power addition for speed ratio

Refer to the same pages as the power ratings.

Read across the top to the column which contains the speed ratio being used.

Then read down to the speed of the faster shaft to obtain the power addition for the speed ratio.

### 10) Correction factor for belt length

Refer to table 5 on page 147 and note the correction factor for the length of belt chosen in step 6).

### 11) Correction factor for angle of contact on the small pulley

Refer to table 6 on page 147 and calculate the value for  $\frac{D-d}{C}$

From the value, choose the nearest correction factor.

### 12) Corrected power per belt (kW)

Add the power addition for speed ratio (step 9) to the power per belt (step 8).

Multiply the result by the correction factors for belt length (step 10) and angle of contact (step 11) to obtain the corrected power per belt.

### 13) number of belts required

Divide the design power (step 2) by the corrected power per belt (step 12) to obtain the number of belts required for the drive.

### 14) Shaft dimensions

From the pulley dimension tables, (pages 161 to 173), check that the chosen pulleys will fit the shafts.

# Selection Procedure

## Wedge Belt Selection Example

Design a Wedge belt drive from a 90kW, 1440 rev/min direct on line start electric motor to a Belt Conveyor which carries copper ore and absorbs 81 kW.

The conveyor has to run at 400 rev/min for 12 hours per day.

The required centre distance is 1200 mm. The motor shaft is 75 mm diameter and the conveyor shaft 105 mm diameter.

### 1) Service factor

From table 1 on page 142, the service factor chosen for a non-uniformly loaded belt conveyor running for 12 hours per day and driven by a direct on line electric motor is **1.3**

### 2) Design power

$$81 \times 1.3 = \mathbf{105.3 \text{ kW}}$$

### 3) Belt section

From table 2 on page 143, note the point of intersection of the design power of 105.3 kW (on the horizontal axis) and the speed of the faster shaft of 1440 rev/min (on the vertical axis).

The point of intersection indicates **SPB or SPC** section wedge belts. A point of intersection near the top of a band usually gives the most economical selection, in this case **SPB** is chosen.

### 4) Speed ratio

$$\frac{1440}{400} = \mathbf{3.60 : 1}$$

### 5) Pulley pitch diameters

From the SPB speed ratio table 3 on page 145, pulley pitch diameters of 280 mm and 1000 mm match the speed ratio requirement of 3.60 : 1

The speed ratio of 1000/280 = 3.57 : 1 will give a driven speed of 403 rev/min.

### 6) Belt length

Using the following formula, calculate the length of belt required :-

$$\text{Belt length (L)} = 2 \times 1200 + \frac{(1000 - 280)^2}{4 \times 1200} + 1.57 \times (1000 + 280)$$

$$= 2400 + 108 + 2010$$

$$= \mathbf{4518 \text{ mm}}$$

from the SPB belt length tables on page 138, the nearest belt is an SPB4500

### 7) Centre distance

The **SPB4500** will give a centre distance of :-

$$1200 - \frac{(4518 - 4500)}{2} = \mathbf{1191 \text{ mm}}$$

### 8) Power per belt (kW)

From the SPB power ratings on table 4 page 146, the power per belt for a 280mm pulley running at 1440 rev/min is **22.55 kW**

### 9) Power addition for speed ratio

From the same page as the power ratings, the power addition for the speed ratio of 3.57 : 1 is **1.21 kW**

### 10) Correction factor for belt length

From table 5 on page 147, the correction factor for an SPB4500 is **1.05**

### 11) Correction factor for angle of contact

$$\text{First, calculate } \frac{D-d}{C}$$

and then refer to table 6 on page 147 to obtain the correction factor.

$$\frac{D-d}{C} = \frac{1000 - 280}{1191} = 0.60$$

the correction factor is **0.96**

### 12) Corrected power per belt (kW)

$$= (22.55 + 1.21) \times 1.05 \times 0.96$$

$$= \mathbf{23.95 \text{ kW per belt}}$$

### 13) Number of belts required

Divide the design power (step 2) by the corrected power/belt (step 12) to obtain the number of belts required.

$$\frac{105.3}{23.95} = 4.4$$

use **5 SPB belts**

### 14) Shaft dimensions

from the pulley dimension tables (pages 168 to 170), it is confirmed the pulleys will fit the shafts

### Drive Specification

Motor pulley : 280 x 5 SPB  
3535 / 75 mm

Conveyor pulley 1000 x 5 SPB  
4545 / 105 mm

5 off SPB4500 giving 1191 mm centres


# Selection Data

## Table 1 - Service Factors

Type of driven machine	Type of prime mover					
	'soft' starts			'heavy' starts		
	<b>ac electric motors:</b> star-delta <b>dc motors:</b> shunt wound <b>engines</b> with 4 or more cylinders all prime movers with mechanical or electronic soft start devices.			<b>ac electric motors :-</b> direct – on – line <b>dc motors :</b> series and compound wound <b>engines</b> with less than 4 cylinders		
	number of hours per day running					
	under 10	10 - 16	over 16	under 10	10 - 16	over 16
<b>Uniform load:</b> light duty agitators, belt conveyors for sand etc., fans upto 7.5 kW, centrifugal compressors and pumps,	<b>1.0</b>	<b>1.1</b>	<b>1.2</b>	<b>1.1</b>	<b>1.2</b>	<b>1.3</b>
<b>Moderate load:</b> variable density agitators, belt conveyors (non-uniform loads), fans over 7.5 kW, other rotary compressors and pumps, generators, machine tools, printing machinery, laundry machinery, rotary screens, rotary woodworking machinery	<b>1.1</b>	<b>1.2</b>	<b>1.3</b>	<b>1.2</b>	<b>1.3</b>	<b>1.4</b>
<b>Heavy load:</b> reciprocating compressors and pumps, positive displacement blowers, heavy duty conveyors such as screw, bucket etc., hammer mills, pulverisers, presses, shears, punches, rubber machinery	<b>1.2</b>	<b>1.3</b>	<b>1.4</b>	<b>1.4</b>	<b>1.5</b>	<b>1.6</b>
<b>Severe load:</b> crushers – gyratory, jaw, roll etc., rolling mills, calenders, quarry machinery, vibrating screens	<b>1.3</b>	<b>1.4</b>	<b>1.5</b>	<b>1.5</b>	<b>1.6</b>	<b>1.8</b>

# Selection Data

Table 2 - Belt Section

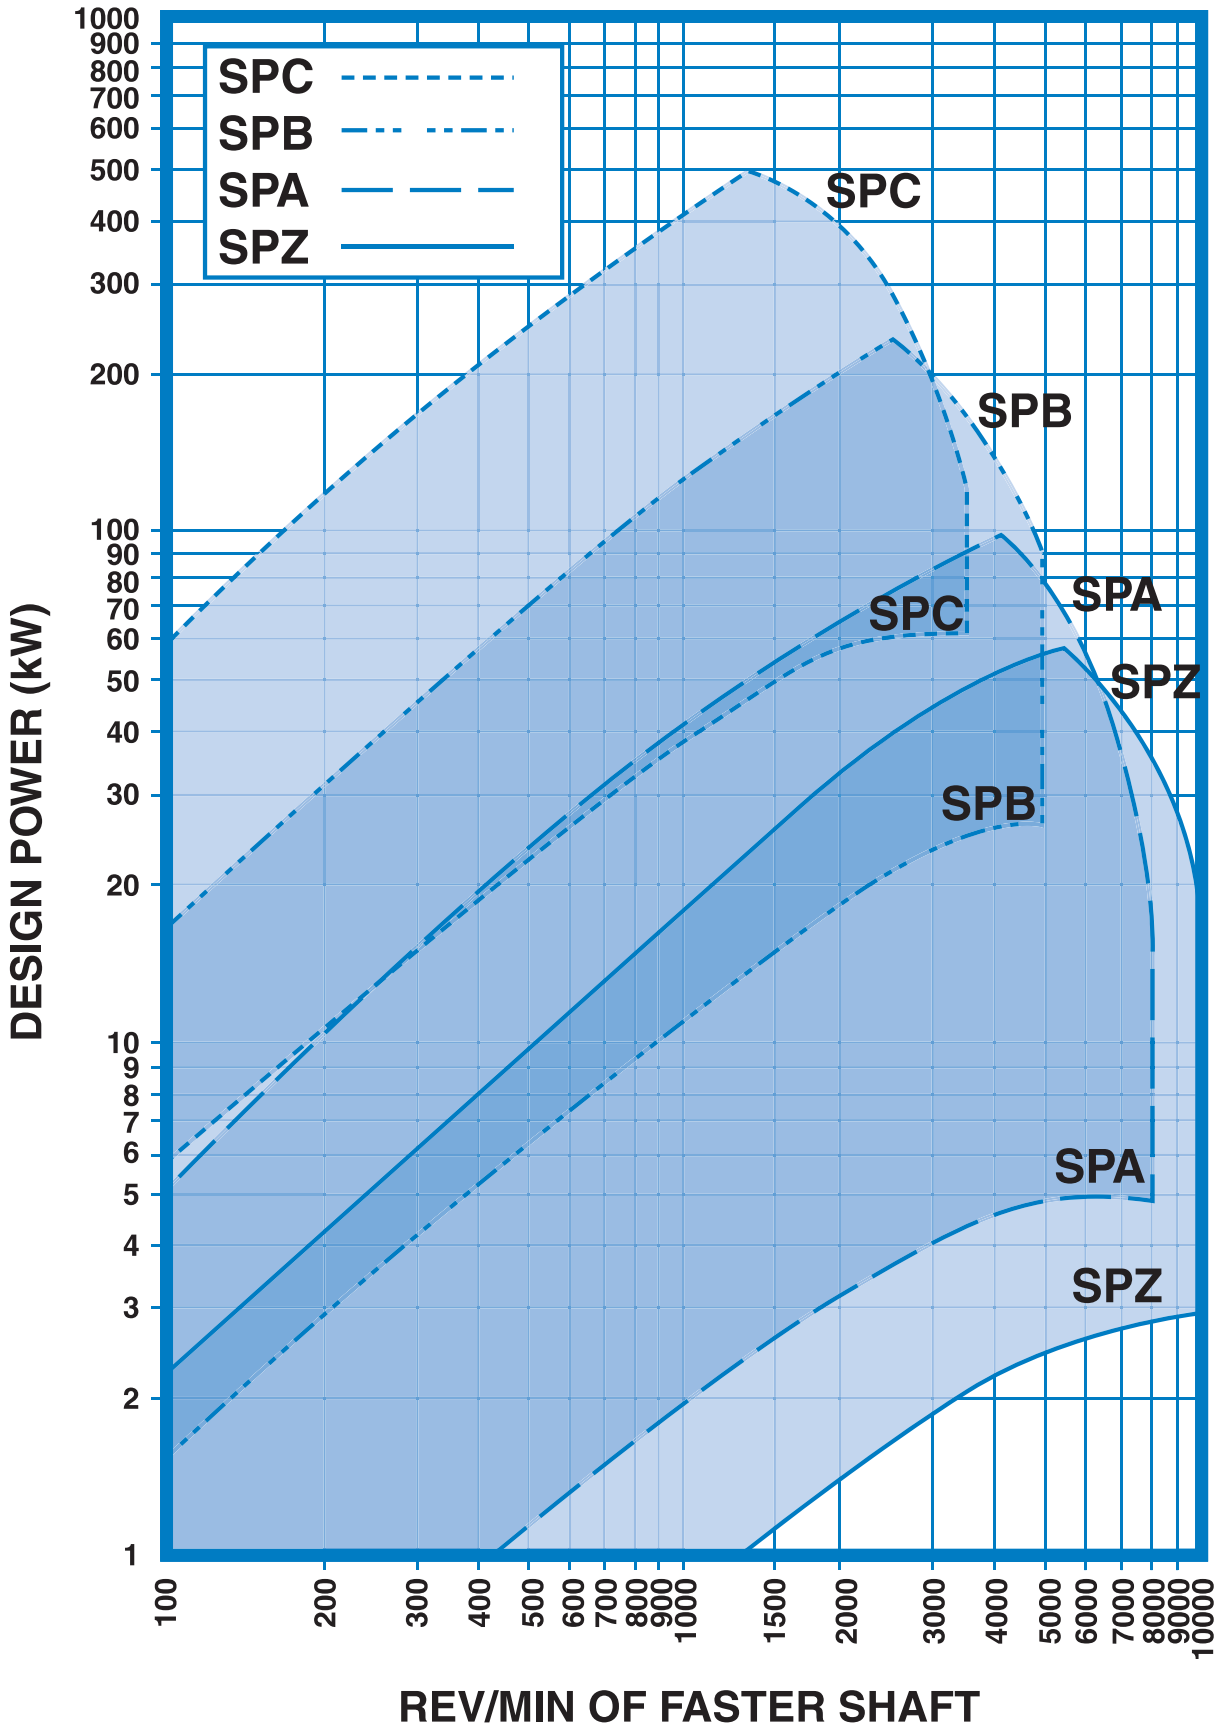

Every effort has been taken to ensure that the data listed in this catalogue is correct. Challenge accepts no liability for any inaccuracies or damage caused.

# Selection Data

**Table 3 - Speed ratios SPZ & SPA**

SPZ	71	75	80	85	90	95	100	106	112	118	125	132	140
71	1.00												
75	1.06	1.00											
80	1.13	1.07	1.00										
85	1.20	1.13	1.06	1.00									
90	1.27	1.20	1.13	1.06	1.00								
95	1.34	1.27	1.19	1.12	1.06	1.00							
100	1.41	1.33	1.25	1.18	1.11	1.05	1.00						
106	1.49	1.41	1.33	1.25	1.18	1.12	1.06	1.00					
112	1.58	1.49	1.40	1.32	1.24	1.18	1.12	1.06	1.00				
118	1.66	1.57	1.48	1.39	1.31	1.24	1.18	1.11	1.05	1.00			
125	1.76	1.67	1.56	1.47	1.39	1.32	1.25	1.18	1.12	1.06	1.00		
132	1.86	1.76	1.65	1.55	1.47	1.39	1.32	1.25	1.18	1.12	1.06	1.00	
140	1.97	1.87	1.75	1.65	1.56	1.47	1.40	1.32	1.25	1.19	1.12	1.06	1.00
150	2.11	2.00	1.88	1.76	1.67	1.58	1.50	1.42	1.34	1.27	1.20	1.14	1.07
160	2.25	2.13	2.00	1.88	1.78	1.68	1.60	1.51	1.43	1.36	1.28	1.21	1.14
170	2.39	2.27	2.13	2.00	1.89	1.79	1.70	1.60	1.52	1.44	1.36	1.29	1.21
180	2.54	2.40	2.25	2.12	2.00	1.89	1.80	1.70	1.61	1.53	1.44	1.36	1.29
190	2.68	2.53	2.38	2.24	2.11	2.00	1.90	1.79	1.70	1.61	1.52	1.44	1.36
200	2.82	2.67	2.50	2.35	2.22	2.11	2.00	1.89	1.79	1.69	1.60	1.52	1.43
224	3.15	2.99	2.80	2.64	2.49	2.36	2.24	2.11	2.00	1.90	1.79	1.70	1.60
250	3.52	3.33	3.13	2.94	2.78	2.63	2.50	2.36	2.23	2.12	2.00	1.89	1.79
280	3.94	3.73	3.50	3.29	3.11	2.95	2.80	2.64	2.50	2.37	2.24	2.12	2.00
315	4.44	4.20	3.94	3.71	3.50	3.32	3.15	2.97	2.81	2.67	2.52	2.39	2.25
355	5.00	4.73	4.44	4.18	3.94	3.74	3.55	3.35	3.17	3.01	2.84	2.69	2.54
400	5.63	5.33	5.00	4.71	4.44	4.21	4.00	3.77	3.57	3.39	3.20	3.03	2.86
450	6.34	6.00	5.63	5.29	5.00	4.74	4.50	4.25	4.02	3.81	3.60	3.41	3.21
500	7.04	6.67	6.25	5.88	5.56	5.26	5.00	4.72	4.46	4.24	4.00	3.79	3.57
630	8.87	8.40	7.88	7.41	7.00	6.63	6.30	5.94	5.63	5.34	5.04	4.77	4.50

SPA	90	95	100	106	112	118	125	132	140	150	160	170	180	190	200
90	1.00														
95	1.06	1.00													
100	1.11	1.05	1.00												
106	1.18	1.12	1.06	1.00											
112	1.24	1.18	1.12	1.06	1.00										
118	1.31	1.24	1.18	1.11	1.05	1.00									
125	1.39	1.32	1.25	1.18	1.12	1.06	1.00								
132	1.47	1.39	1.32	1.25	1.18	1.12	1.06	1.00							
140	1.56	1.47	1.40	1.32	1.25	1.19	1.12	1.06	1.00						
150	1.67	1.58	1.50	1.42	1.34	1.27	1.20	1.14	1.07	1.00					
160	1.78	1.68	1.60	1.51	1.43	1.36	1.28	1.21	1.14	1.07	1.00				
170	1.89	1.79	1.70	1.60	1.52	1.44	1.36	1.29	1.21	1.13	1.06	1.00			
180	2.00	1.89	1.80	1.70	1.61	1.53	1.44	1.36	1.29	1.20	1.13	1.06	1.00		
190	2.11	2.00	1.90	1.79	1.70	1.61	1.52	1.44	1.36	1.27	1.19	1.12	1.06	1.00	
200	2.22	2.11	2.00	1.89	1.79	1.69	1.60	1.52	1.43	1.33	1.25	1.18	1.11	1.05	1.00
212	2.36	2.23	2.12	2.00	1.89	1.80	1.70	1.61	1.51	1.41	1.33	1.25	1.18	1.12	1.06
224	2.49	2.36	2.24	2.11	2.00	1.90	1.79	1.70	1.60	1.49	1.40	1.32	1.24	1.18	1.12
236	2.62	2.48	2.36	2.23	2.11	2.00	1.89	1.79	1.69	1.57	1.48	1.39	1.31	1.24	1.18
250	2.78	2.63	2.50	2.36	2.23	2.12	2.00	1.89	1.79	1.67	1.56	1.47	1.39	1.32	1.25
280	3.11	2.95	2.80	2.64	2.50	2.37	2.24	2.12	2.00	1.87	1.75	1.65	1.56	1.47	1.40
300	3.33	3.16	3.00	2.83	2.68	2.54	2.40	2.27	2.14	2.00	1.88	1.76	1.67	1.58	1.50
315	3.50	3.32	3.15	2.97	2.81	2.67	2.52	2.39	2.25	2.10	1.97	1.85	1.75	1.66	1.58
355	3.94	3.74	3.55	3.35	3.17	3.01	2.84	2.69	2.54	2.37	2.22	2.09	1.97	1.87	1.78
400	4.44	4.21	4.00	3.77	3.57	3.39	3.20	3.03	2.86	2.67	2.50	2.35	2.22	2.11	2.00
450	5.00	4.74	4.50	4.25	4.02	3.81	3.60	3.41	3.21	3.00	2.81	2.65	2.50	2.37	2.25
500	5.56	5.26	5.00	4.72	4.46	4.24	4.00	3.79	3.57	3.33	3.13	2.94	2.78	2.63	2.50
560	6.22	5.89	5.60	5.28	5.00	4.75	4.48	4.24	4.00	3.73	3.50	3.29	3.11	2.95	2.80
630	7.00	6.63	6.30	5.94	5.63	5.34	5.04	4.77	4.50	4.20	3.94	3.71	3.50	3.32	3.15
800	8.89	8.42	8.00	7.55	7.14	6.78	6.40	6.06	5.71	5.33	5.00	4.71	4.44	4.21	4.00

All dimensions in millimetres unless otherwise stated. Every effort has been taken to ensure that the data listed in this catalogue is correct. Challenge accepts no liability for any inaccuracies or damage caused.

# Selection Data

**Table 3 - Speed ratios SPB & SPC**

SPB	140	150	160	170	180	190	200	212	224	236	250	280	300	315
140	1.00													
150	1.07	1.00												
160	1.14	1.07	1.00											
170	1.21	1.13	1.06	1.00										
180	1.29	1.20	1.13	1.06	1.00									
190	1.36	1.27	1.19	1.12	1.06	1.00								
200	1.43	1.33	1.25	1.18	1.11	1.05	1.00							
212	1.51	1.41	1.33	1.25	1.18	1.12	1.06	1.00						
224	1.60	1.49	1.40	1.32	1.24	1.18	1.12	1.06	1.00					
236	1.69	1.57	1.48	1.39	1.31	1.24	1.18	1.11	1.05	1.00				
250	1.79	1.67	1.56	1.47	1.39	1.32	1.25	1.18	1.12	1.06	1.00			
280	2.00	1.87	1.75	1.65	1.56	1.47	1.40	1.32	1.25	1.19	1.12	1.00		
300	2.14	2.00	1.88	1.76	1.67	1.58	1.50	1.42	1.34	1.27	1.20	1.07	1.00	
315	2.25	2.10	1.97	1.85	1.75	1.66	1.58	1.49	1.41	1.33	1.26	1.13	1.05	1.00
335	2.39	2.23	2.09	1.97	1.86	1.76	1.68	1.58	1.50	1.42	1.34	1.20	1.12	1.06
355	2.54	2.37	2.22	2.09	1.97	1.87	1.78	1.67	1.58	1.50	1.42	1.27	1.18	1.13
400	2.86	2.67	2.50	2.35	2.22	2.11	2.00	1.89	1.79	1.69	1.60	1.43	1.33	1.27
450	3.21	3.00	2.81	2.65	2.50	2.37	2.25	2.12	2.01	1.91	1.80	1.61	1.50	1.43
500	3.57	3.33	3.13	2.94	2.78	2.63	2.50	2.36	2.23	2.12	2.00	1.79	1.67	1.59
560	4.00	3.73	3.50	3.29	3.11	2.95	2.80	2.64	2.50	2.37	2.24	2.00	1.87	1.78
630	4.50	4.20	3.94	3.71	3.50	3.32	3.15	2.97	2.81	2.67	2.52	2.25	2.10	2.00
710	5.07	4.73	4.44	4.18	3.94	3.74	3.55	3.35	3.17	3.01	2.84	2.54	2.37	2.25
800	5.71	5.33	5.00	4.71	4.44	4.21	4.00	3.77	3.57	3.39	3.20	2.86	2.67	2.54
900	6.43	6.00	5.63	5.29	5.00	4.74	4.50	4.25	4.02	3.81	3.60	3.21	3.00	2.86
1000	7.14	6.67	6.25	5.88	5.56	5.26	5.00	4.72	4.46	4.24	4.00	3.57	3.33	3.17
1250	8.93	8.33	7.81	7.35	6.94	6.58	6.25	5.90	5.58	5.30	5.00	4.46	4.17	3.97

SPC	224	236	250	265	280	300	315	335	355	375	400	425	450	475	500	530	560
224	1.00																
236	1.05	1.00															
250	1.12	1.06	1.00														
265	1.18	1.12	1.06	1.00													
280	1.25	1.19	1.12	1.06	1.00												
300	1.34	1.27	1.20	1.13	1.07	1.00											
315	1.41	1.33	1.26	1.19	1.13	1.05	1.00										
335	1.50	1.42	1.34	1.26	1.20	1.12	1.06	1.00									
355	1.58	1.50	1.42	1.34	1.27	1.18	1.13	1.06	1.00								
375	1.67	1.59	1.50	1.42	1.34	1.25	1.19	1.12	1.06	1.00							
400	1.79	1.69	1.60	1.51	1.43	1.33	1.27	1.19	1.13	1.07	1.00						
425	1.90	1.80	1.70	1.60	1.52	1.42	1.35	1.27	1.20	1.13	1.06	1.00					
450	2.01	1.91	1.80	1.70	1.61	1.50	1.43	1.34	1.27	1.20	1.13	1.06	1.00				
475	2.12	2.01	1.90	1.79	1.70	1.58	1.51	1.42	1.34	1.27	1.19	1.12	1.06	1.00			
500	2.23	2.12	2.00	1.89	1.79	1.67	1.59	1.49	1.41	1.33	1.25	1.18	1.11	1.05	1.00		
530	2.37	2.25	2.12	2.00	1.89	1.77	1.68	1.58	1.49	1.41	1.33	1.25	1.18	1.12	1.06	1.00	
560	2.50	2.37	2.24	2.11	2.00	1.87	1.78	1.67	1.58	1.49	1.40	1.32	1.24	1.18	1.12	1.06	1.00
630	2.81	2.67	2.52	2.38	2.25	2.10	2.00	1.88	1.77	1.68	1.58	1.48	1.40	1.33	1.26	1.19	1.13
710	3.17	3.01	2.84	2.68	2.54	2.37	2.25	2.12	2.00	1.89	1.78	1.67	1.58	1.49	1.42	1.34	1.27
800	3.57	3.39	3.20	3.02	2.86	2.67	2.54	2.39	2.25	2.13	2.00	1.88	1.78	1.68	1.60	1.51	1.43
1000	4.46	4.24	4.00	3.77	3.57	3.33	3.17	2.99	2.82	2.67	2.50	2.35	2.22	2.11	2.00	1.89	1.79
1250	5.58	5.30	5.00	4.72	4.46	4.17	3.97	3.73	3.52	3.33	3.13	2.94	2.78	2.63	2.50	2.36	2.23



# Selection Data

Table 4 - Power ratings

SPZ power ratings (kW)									power addition (kW) for speed ratio				
rev/min	71	75	80	90	100	112	125	140	1.00 - 1.05	1.06 - 1.25	1.26 - 2.00	2.01 - 3.00	over 3.00
400	0.51	0.57	0.63	0.76	0.91	1.08	1.25	1.47	0.00	0.04	0.07	0.07	0.07
600	0.70	0.78	0.89	1.08	1.30	1.55	1.82	2.12	0.00	0.05	0.08	0.08	0.08
720	0.82	0.89	1.04	1.28	1.54	1.83	2.15	2.50	0.00	0.06	0.10	0.11	0.12
800	0.88	0.99	1.14	1.41	1.68	2.00	2.35	2.74	0.00	0.07	0.11	0.12	0.13
960	1.01	1.16	1.33	1.66	1.96	2.34	2.74	3.23	0.00	0.08	0.13	0.15	0.15
1200	1.23	1.40	1.60	2.01	2.38	2.87	3.37	3.93	0.00	0.10	0.17	0.17	0.19
1440	1.45	1.63	1.86	2.34	2.80	3.38	3.98	4.62	0.00	0.13	0.20	0.22	0.23
1600	1.57	1.76	2.03	2.56	3.06	3.68	4.33	5.05	0.00	0.14	0.22	0.24	0.26
2000	1.87	2.10	2.43	3.08	3.70	4.42	5.20	6.09	0.00	0.17	0.28	0.30	0.32
2400	2.13	2.43	2.80	3.55	4.27	5.10	5.99	7.00	0.00	0.21	0.33	0.36	0.39
2800	2.38	2.74	3.15	4.00	4.81	5.76	6.75	7.88	0.00	0.24	0.39	0.43	0.45
2880	2.43	2.80	3.22	4.09	4.92	5.89	6.90	8.05	0.00	0.25	0.40	0.44	0.45
3200	2.62	3.01	3.48	4.41	5.32	6.36	7.43	8.65	0.00	0.28	0.45	0.49	0.51
3600	2.85	3.26	3.80	4.80	5.80	6.92	8.07	9.35	0.00	0.31	0.50	0.55	0.58
4000	3.03	3.47	4.06	5.14	6.20	7.38	8.58	9.86	0.00	0.35	0.56	0.61	0.64
4500	3.25	3.72	4.37	5.54	6.67	7.92	9.17	10.42	0.00	0.39	0.62	0.68	0.72
5000	3.44	3.96	4.62	5.87	7.05	8.32	9.56	10.79	0.00	0.44	0.70	0.73	0.77

SPA power ratings (kW)											power addition (kW) for speed ratio				
rev/min	90	100	112	118	125	132	140	160	180	200	1.00 - 1.05	1.06 - 1.25	1.26 - 2.00	2.01 - 3.00	over 3.00
400	0.87	1.11	1.43	1.56	1.73	1.90	2.09	2.59	3.06	3.55	0.00	0.07	0.14	0.16	0.16
600	1.20	1.55	1.99	2.19	2.44	2.69	2.97	3.66	4.35	5.02	0.00	0.13	0.21	0.23	0.25
720	1.40	1.81	2.32	2.57	2.86	3.15	3.48	4.30	5.11	5.88	0.00	0.16	0.26	0.28	0.30
800	1.50	1.97	2.54	2.81	3.13	3.44	3.81	4.72	5.61	6.47	0.00	0.18	0.29	0.31	0.33
960	1.72	2.28	2.96	3.30	3.66	4.04	4.47	5.55	6.59	7.62	0.00	0.21	0.34	0.37	0.40
1200	2.04	2.72	3.55	3.98	4.42	4.88	5.41	6.72	7.99	9.24	0.00	0.27	0.43	0.47	0.49
1440	2.35	3.15	4.12	4.64	5.17	5.71	6.33	7.86	9.35	10.81	0.00	0.32	0.51	0.56	0.59
1600	2.53	3.41	4.47	5.02	5.60	6.19	6.87	8.54	10.14	11.72	0.00	0.36	0.57	0.62	0.66
2000	2.98	4.03	5.33	5.95	6.66	7.38	8.20	10.18	12.04	13.92	0.00	0.45	0.71	0.78	0.82
2400	3.31	4.56	6.04	6.76	7.58	8.39	9.32	11.52	13.61	15.60	0.00	0.54	0.86	0.93	0.99
2800	3.66	5.11	6.78	7.61	8.54	9.45	10.48	12.91	15.21	17.29	0.00	0.63	1.00	1.09	1.15
2880	3.68	5.16	6.84	7.68	8.62	9.53	10.57	13.02	15.34	17.42	0.00	0.64	1.03	1.12	1.19
3200	3.88	5.47	7.27	8.18	9.18	10.15	11.23	13.76	16.09	18.51	0.00	0.72	1.14	1.25	1.32
3600	4.11	5.83	7.77	8.76	9.83	10.85	12.00	14.60	16.91	19.71	0.00	0.81	1.29	1.40	1.48

SPB power ratings (kW)										power addition (kW) for speed ratio					
rev/min	140	160	180	200	224	236	250	280	315	1.00 - 1.05	1.06 - 1.25	1.26 - 2.00	2.01 - 3.00	over 3.00	
200	1.40	1.79	2.19	2.57	3.06	3.28	3.52	4.12	4.78		0.00	0.09	0.15	0.16	0.17
400	2.52	3.29	4.02	4.78	5.66	6.10	6.61	7.70	8.92		0.00	0.19	0.29	0.32	0.34
600	3.50	4.60	5.65	6.73	7.98	8.50	9.33	10.88	12.62		0.00	0.28	0.45	0.48	0.51
720	4.08	5.36	6.61	7.88	9.34	9.90	10.93	12.75	14.78		0.00	0.33	0.54	0.59	0.62
800	4.45	5.87	7.23	8.63	10.24	10.94	11.98	13.97	16.18		0.00	0.37	0.60	0.65	0.69
960	5.19	6.85	8.48	10.12	12.03	13.00	14.04	16.37	18.94		0.00	0.44	0.70	0.77	0.81
1200	6.17	8.20	10.18	12.15	14.45	15.61	16.84	19.53	22.53		0.00	0.56	0.89	0.97	1.03
1440	7.13	9.50	11.84	14.11	16.79	18.12	19.53	22.55	25.93		0.00	0.66	1.06	1.15	1.21
1600	7.66	10.25	12.77	15.20	18.04	19.46	20.96	24.14	27.56		0.00	0.75	1.19	1.29	1.37
1800	8.31	11.16	13.89	16.52	19.56	21.07	22.67	26.01	29.47		0.00	0.84	1.34	1.45	1.54
2000	8.94	12.04	14.97	17.80	21.00	22.60	24.29	27.76	31.21		0.00	0.93	1.48	1.62	1.71
2400	9.91	13.37	16.59	19.63	23.15	24.55	26.83	29.45	31.95		0.00	1.11	1.78	1.94	2.05
2880	10.95	14.78	18.29	21.51	25.29	26.39	29.29	-	-		0.00	1.32	2.11	2.31	2.44
3000	11.11	15.01	18.56	21.75	25.45	26.53	29.42	-	-		0.00	1.39	2.23	2.42	2.57

All dimensions in millimetres unless otherwise stated. Every effort has been taken to ensure that the data listed in this catalogue is correct. Challenge accepts no liability for any inaccuracies or damage caused.

# Selection Data

**Table 4 - Power ratings (continued)**

SPC power ratings (kW)														power addition (kW) for speed ratio				
rev/min	224	236	250	265	280	300	315	335	355	400	450	500	560	1.00-1.05	1.06-1.25	1.26-2.00	2.01-3.00	over 3.00
200	3.99	4.47	4.95	5.27	6.04	6.71	7.30	8.09	8.73	10.34	12.06	13.81	15.87	0.00	0.29	0.46	0.50	0.53
400	7.16	8.04	8.98	10.02	11.05	12.28	13.40	14.78	16.15	19.09	22.40	25.59	29.40	0.00	0.57	0.92	1.00	1.06
600	9.86	11.04	12.43	13.99	15.35	17.14	18.71	20.63	22.52	26.65	31.17	35.57	40.66	0.00	0.86	1.37	1.50	1.59
720	11.41	12.77	14.43	16.29	17.84	19.95	21.79	24.03	26.20	31.02	36.21	41.27	47.04	0.00	1.03	1.65	1.80	1.90
800	12.41	13.84	15.71	17.66	19.46	21.74	23.75	26.18	28.54	33.76	39.32	44.33	50.77	0.00	1.15	1.83	2.00	2.11
960	14.34	15.93	18.20	20.33	22.59	25.23	27.56	30.36	33.08	39.06	45.29	50.11	57.80	0.00	1.37	2.20	2.40	2.54
1200	16.78	18.78	21.36	23.73	26.53	29.62	32.29	35.41	38.55	45.07	51.63	56.89	63.01	0.00	1.72	2.75	3.00	3.17
1440	19.05	21.44	24.30	26.88	30.17	33.67	36.63	40.02	43.49	50.36	56.96	62.32	-	0.00	2.06	3.30	3.60	3.81
1600	20.14	22.92	25.82	28.93	29.55	35.57	38.64	42.18	45.58	52.35	58.09	-	-	0.00	2.29	3.67	4.00	4.23
1800	21.39	24.30	27.39	30.63	33.82	37.51	40.66	44.04	47.43	53.97	-	-	-	0.00	2.58	4.12	4.50	4.76
2000	22.25	25.33	28.53	31.82	35.09	38.74	41.82	45.08	48.40	-	-	-	-	0.00	2.86	4.58	5.00	5.29

**Table 5 - Correction factors for belt length**

SPZ		SPA		SPB		SPC	
belt length (mm)	correction factor	belt length (mm)	correction factor	belt length (mm)	correction factor	belt length (mm)	correction factor
510 - 710	0.80	750 - 900	0.80	1250 - 1340	0.80	2000 - 2240	0.80
737 - 950	0.85	925 - 1120	0.85	1400 - 1600	0.85	2360 - 2800	0.85
962 - 1250	0.90	1132 - 1600	0.90	1650 - 2240	0.90	3000 - 3350	0.90
1270 - 1500	0.95	1632 - 2240	0.95	2280 - 3000	0.95	3550 - 4500	0.95
1520 - 2120	1.00	2300 - 2800	1.00	3150 - 3750	1.00	4750 - 5600	1.00
2150 - 2840	1.05	2900 - 3550	1.05	3800 - 5000	1.05	6000 - 8000	1.05
2990 - 3810	1.10	3750 - 4500	1.10	5070 - 7990	1.10	8500 - 10000	1.10

**Table 6 - correction factors for angle of contact on small pulley**

$\frac{D-d}{C}$	angle of contact	correction factor	$\frac{D-d}{C}$	angle of contact	correction factor
0.00	180°	1.00	0.80	133°	0.94
0.10	174°	0.99	0.90	127°	0.92
0.20	169°	0.99	1.00	120°	0.91
0.30	163°	0.98	1.10	113°	0.89
0.40	157°	0.98	1.20	106°	0.87
0.50	151°	0.97	1.30	99°	0.85
0.60	145°	0.96	1.40	91°	0.82
0.70	139°	0.95	1.45	87°	0.80

# Belt Tensioning

Challenge 'V' and Wedge belts are manufactured to ensure precise length and to stay matched during storage and on the drive for many years. This also ensures that each belt, when correctly tensioned, will take the correct share of the load to be transmitted thus helping to achieve maximum life for the drive.


We recommend using a spring loaded belt tensioning indicator to obtain the correct tension for the drive thus ensuring optimum life from the belts. This method has been verified by successful drives globally

## Method of belt tensioning using a spring loaded belt tension indicator


- 1] Install the belts to be a snug fit around the pulleys
- 2] Rotate the pulleys a few revolutions to allow the belts to sit correctly in the pulley grooves. Be careful not to trap fingers !
- 3] Calculate the deflection in mm on a basis of 16 mm per metre of centre distance
- 4] Set the lower black rubber ring at the deflection required in mm on the lower scale
- 5] Set the upper ring against the bottom edge of the top tube
- 6] Place the belt tension indicator on top of the belt at the middle of the centre distance and apply a force at right angles to the belt, deflecting it to the point where the lower rubber ring is level with the top of an adjacent belt.
- 7] Read off the tensioning force value indicated by the top edge of the upper rubber ring
- 8] Compare this force to the value in the table and adjust the tension until the correct value is attained
- 9] A new drive should be tensioned to the 1.3 x tensioning force to allow for belt tension decay during the initial bedding in period. After approximately 30 minutes of running and thereafter, the tension should be set to the basic tensioning value

- 10] For a single belt drive using a spring loaded belt tension indicator, use a straight edge across the two pulleys to act as a reference point when using the tension indicator

- 11] If a spring loaded belt tension indicator is not available, using a spring balance and rule is acceptable.

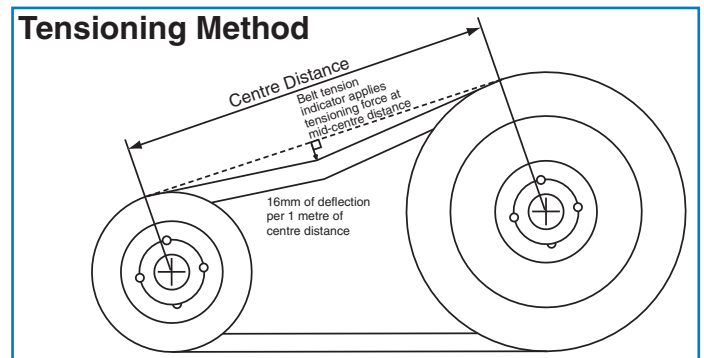

## Belt Tension Indicator

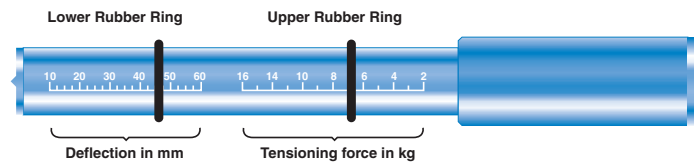

## Tensioning forces

Belt section	Tensioning force to deflect belt 16 mm per metre of centre distance		
	Small pulley diameter (mm)	Basic tensioning forces (kgf)	1.3 x tensioning forces (kgf)
SPZ	56 – 71	1.6	2.1
	75 – 90	1.8	2.3
	90 - 125	2.0	2.6
	125 +	2.1	2.7
SPA	63 – 100	2.2	2.8
	106 – 140	3.0	3.9
	150 – 200	3.7	4.8
	200 +	4.0	5.2
SPB	100 – 160	4.0	5.2
	170 – 224	5.1	6.6
	236 – 355	6.3	8.2
	355 +	6.6	8.6
SPC	200 – 250	7.1	9.2
	265 – 355	9.4	12.2
	375 +	12.0	15.6
Z	56 – 100	0.5 – 0.8	0.6 – 1.0
A	80 – 140	1.0 – 1.5	1.3 – 1.9
B	125 – 200	2.0 – 3.1	2.6 – 4.0
C	200 – 400	4.1 – 6.1	5.5 – 7.9
D	355 – 600	7.1 – 10.7	9.2 – 13.9

The tensioning forces in the table above are representative for a correctly designed drive. A precise tensioning force for a particular drive can be calculated from basic principles if desired. Contact Challenge for details

All dimensions in millimetres unless otherwise stated. Every effort has been taken to ensure that the data listed in this catalogue is correct. Challenge accepts no liability for any inaccuracies or damage caused.

# Technical Information

## Design Data Required For Belt Drives

- 1) Type of prime driver
- 2) Starting arrangement: 'Soft Start'  
'Heavy Start'
- 3) Speed of prime driver in rev/min
- 4) Power rating of prime driver
- 5) Type of driven machine
- 6) Speed of driven machine in rev/min
- 7) Absorbed power of the driven machine
- 8) Operating hours / day
- 9) Shaft diameters of both driver and driven machines
- 10) Drive centre distance. Is this fixed or does it have adjustment?
- 11) Are there any space constraints
- 12) Are there any environmental issues such as temperature, water, oil etc.

## Belt Length Calculation

$$\text{Length (L)} = 2C + \frac{(D-d)^2}{4C} + 1.57 (D+d)$$

where

- L = Pitch length of belt in millimetres.
- C = Centre distance in millimetres.
- D = Pitch diam. of large pulley in millimetres.
- d = Pitch diam. of small pulley in millimetres.

## Centre distance, given pulley diameters and belt length:

$$\text{Centre Distance (C)} = A + \sqrt{A^2 - B}$$

where

$$A = \frac{L}{4} - 0.3925 (D + d) \quad \text{and} \quad B = \frac{(D - d)^2}{8}$$

## Belt Speed Calculation

$$S = \frac{d \times n}{19100} \quad \text{m/s}$$

- where S = belt speed in - metres per second (m/s)
- d = pulley pitch diameter in mm
- n = rotational speed of the same pulley in rev/min

## Installation and Maintenance of 'V' and Wedge Belt Drives

Modern 'V' and Wedge belt drives are highly efficient, but efficiency and reliability are only maintained if belts are correctly installed, tensioned and maintained.

Particular care must be made in maintaining the correct tension. Incorrectly tensioned drives are the overwhelming cause of premature drive failure.

The correct use of a tension indicator will ensure optimum life is achieved from your drive.

### Installation

#### Pulleys

Inspect pulley grooves for wear and ensure there are no ridges, score marks, rust or pitting and that the groove has been machined to the correct International standard.

#### Alignment

To avoid premature belt wear, correct pulley alignment is essential. Beware of using straight edges that may not be straight! A piece of string stretched tight is more reliable. Pulley misalignment must not be visible.

If a laser alignment device is available, it should be used.

#### Belt installation

The drive centre distance should be reduced (normally by adjusting the prime mover position) so that the belts can be fitted easily into the pulley grooves. The belts must never be forced into the grooves as this poor practice could rupture the load carrying cords causing early drive failure.

#### Tensioning

See page 148 for the correct method of tensioning Challenge 'V' and Wedge belts.

#### Guards

When guards are fitted to drives, it is essential they allow the free movement of air in order to avoid unnecessary heat build up.

Preferably, guards should be of wire mesh design.


#### Tensioning pulleys (sometimes called jockey pulleys)

If tensioning pulleys are to be used, follow the basic rules below :-

'V'-Belts – a flat pulley bearing on the outside of the drive is acceptable. The pulley should be fitted to bear on the slack side of the drive near to the small pulley. If a grooved pulley is used on the inside of the drive, it should be positioned near to the large pulley.

Wedge Belts – the tensioning pulley must be grooved and fitted onto the inside of the slack side of the drive near to the large pulley.

The tensioning pulley diameter must be at least the diameter of the small pulley on the drive.

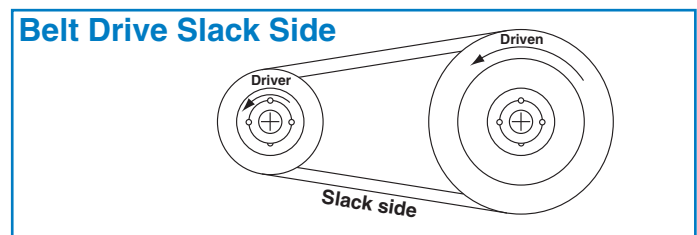

# Trouble Shooting

## Trouble Shooting

Problem	Probable Cause												Solutions											
	Exposure to Elements	Levered over Pulley	Contact with Pulley	Insufficient Tension	Stalled Driven Pulley	Constant Slippage	Rough Pulley	Sub Standard Pulley	Excessive Tension	Shock Load	Foreign Material	Excessive Dust	Worn Pulleys	High Ambient Temperature	Damaged Tensile Member	Incorrect Drive Set up	Improper Make-up	Mixed Old & New Belts	Different Materials	Belts/Pulleys Incompatible	Clean Pulleys & Belts	Replace Belts & Belts		
Loose Cover & Swell	*																				*			
Weathering or Cracks	*																				*			
Gouges		*																			*			
Spin Burn		*									*										*			
Envelope Wear		*									*										*			
Uneven Envelope Wear		*									*										*			
Ply Separation		*									*										*			
Side Split		*									*										*			
Broken Belts		*									*										*			
Belt Turn Over		*									*										*			
Hardening & Premature Cracking		*									*										*			
Belt Squeal		*									*										*			
Excessive Stretch		*									*										*			
Excessive Vibration		*									*										*			
Belts too Long at Installation											*										*			
Belts too Short at Installation											*										*			
Mismatched Belts at Installation											*										*			

### Question to Ask on "Belt Failures"


- 1) Ask for the above information. Check the design, using this information?
- 2) Were the belts tensioned correctly?
- 3) Has the alignment of the drive been checked?
- 4) Have the pulleys been checked for wear?
- 5) Ensure that the belts were not "levered" onto the pulley.
- 6) Compare the belts visual condition against the under mentioned "Trouble Shooting" table in "problems" and decide on the best probable cause/s.

# Classical Timing Belts

## Challenge Classical Timing Belts

Challenge classical synchronous belts are manufactured to ISO 5296 in four pitch sizes.

### Belt Dimensions

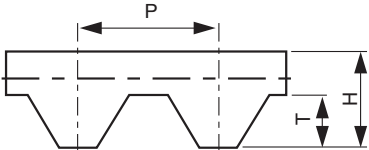	XL	L	H	XH	
	Extra Light	Light	Heavy	Extra Heavy	
	Belt Pitch (P)	1/5" (5.080)	3/8" (9.525)	1/2" (12.700)	7/8" (22.225)
	Tooth Depth (T)	1.270	1.910	2.290	6.350
Belt Thickness (H)	2.400	3.600	4.400	11.400	

### XL (Extra Light Series) 1/5" Pitch (5.08mm)

Width			Pitch Length	Number of Teeth
1/4" (6.5 mm) Part Number	5/16" (7.9 mm) Part Number	3/8" (9.5 mm) Part Number		
60XL025	60XL031	60XL037	152.4	30
70XL025	70XL031	70XL037	177.8	35
80XL025	80XL031	80XL037	203.2	40
90XL025	90XL031	90XL037	228.6	45
98XL025	98XL031	98XL037	248.9	49
100XL025	100XL031	100XL037	254.0	50
102XL025	102XL031	102XL037	259.1	51
104XL025	104XL031	104XL037	264.2	52
106XL025	106XL031	106XL037	269.2	53
110XL025	110XL031	110XL037	279.4	55
120XL025	120XL031	120XL037	304.8	60
130XL025	130XL031	130XL037	330.2	65
140XL025	140XL031	140XL037	355.6	70
146XL025	146XL031	146XL037	370.8	73
150XL025	150XL031	150XL037	381.0	75
156XL025	156XL031	156XL037	396.2	78
160XL025	160XL031	160XL037	406.4	80
170XL025	170XL031	170XL037	431.8	85
176XL025	176XL031	176XL037	447.0	88
180XL025	180XL031	180XL037	457.2	90
182XL025	182XL031	182XL037	462.3	91
188XL025	188XL031	188XL037	477.5	94
190XL025	190XL031	190XL037	482.6	95
198XL025	198XL031	198XL037	502.9	99
200XL025	200XL031	200XL037	508.0	100
202XL025	202XL031	202XL037	513.1	101
210XL025	210XL031	210XL037	533.4	105
212XL025	212XL031	212XL037	538.5	106
214XL025	214XL031	214XL037	543.6	107
220XL025	220XL031	220XL037	558.8	110
228XL025	228XL031	228XL037	579.1	114
230XL025	230XL031	230XL037	584.2	115
234XL025	234XL031	234XL037	594.4	117
240XL025	240XL031	240XL037	609.6	120
250XL025	250XL031	250XL037	635.0	125
260XL025	260XL031	260XL037	660.4	130

# Classical Timing Belts

## L (Light Series) 3/8" Pitch (9.525mm)

Width			Pitch Length	Number of Teeth
1/2" (13 mm) Part Number	3/4" (19 mm) Part Number	1" (25 mm) Part Number		
124L050	124L075	124L100	314.3	33
135L050	135L075	135L100	342.9	36
150L050	150L075	150L100	381.0	40
173L050	173L075	173L100	438.2	46
187L050	187L075	187L100	476.3	50
202L050	202L075	202L100	514.4	54
210L050	210L075	210L100	533.4	56
225L050	225L075	225L100	571.5	60
240L050	240L075	240L100	609.6	64
255L050	255L075	255L100	647.7	68
270L050	270L075	270L100	685.8	72
285L050	285L075	285L100	723.9	76
300L050	300L075	300L100	762.0	80
322L050	322L075	322L100	819.2	86
334L050	334L075	334L100	848.4	89
345L050	345L075	345L100	876.3	92
367L050	367L075	367L100	933.5	98
390L050	390L075	390L100	990.6	104
405L050	405L075	405L100	1028.7	108
412L050	412L050	412L100	1047.8	110
420L050	420L075	420L100	1066.8	112
450L050	450L075	450L100	1143.0	120
480L050	480L075	480L100	1219.2	128
510L050	510L075	510L100	1295.4	136
540L050	540L075	540L100	1371.6	144
600L050	600L075	600L100	1524.0	160



# Classical Timing Belts

## H (Heavy Series) 1/2" Pitch (12.7mm)

Width					Pitch Length	Number of Teeth
3/4" (19 mm) Part Number	1" (25 mm) Part Number	1.1/2" (38 mm) Part Number	2" (51 mm) Part Number	3" (75 mm) Part Number		
240H075	240H100	240H150	240H200	240H300	609.6	48
270H075	270H100	270H150	270H200	270H300	685.8	54
300H075	300H100	300H150	300H200	300H300	762.0	60
310H075	310H100	310H150	310H200	310H300	787.4	62
330H075	330H100	330H150	330H200	330H300	838.2	66
360H075	360H100	360H150	360H200	360H300	914.4	72
370H075	370H100	370H150	370H200	370H300	939.8	74
390H075	390H100	390H150	390H200	390H300	990.6	78
420H075	420H100	420H150	420H200	420H300	1066.8	84
450H075	450H100	450H150	450H200	450H300	1143.0	90
480H075	480H100	480H150	480H200	480H300	1219.2	96
510H075	510H100	510H150	510H200	510H300	1295.4	102
540H075	540H100	540H150	540H200	540H300	1371.6	108
570H075	570H100	570H150	570H200	570H300	1447.8	114
600H075	600H100	600H150	600H200	600H300	1524.0	120
630H075	630H100	630H150	630H200	630H300	1600.2	126
660H075	660H100	660H150	660H200	660H300	1676.4	132
670H075	670H100	670H150	670H200	670H300	1701.8	134
700H075	700H100	700H150	700H200	700H300	1778.0	140
725H075	725H100	725H150	725H200	725H300	1841.5	145
750H075	750H100	750H150	750H200	750H300	1905.0	150
800H075	800H100	800H150	800H200	800H300	2032.0	160
850H075	850H100	850H150	850H200	850H300	2159.0	170
900H075	900H100	900H150	900H200	900H300	2286.0	180
1000H075	1000H100	1000H150	1000H200	1000H300	2540.0	200
1100H075	1100H100	1100H150	1100H200	1100H300	2794.0	220
1120H075	1120H100	1120H150	1120H200	1120H300	2844.8	224
1140H075	1140H100	1140H150	1140H200	1140H300	2895.6	228
1150H075	1150H100	1150H150	1150H200	1150H300	2921.0	230
1250H075	1250H100	1250H150	1250H200	1250H300	3175.0	250
1400H075	1400H100	1400H150	1400H200	1400H300	3556.0	280
1645H075	1645H100	1645H150	1645H200	1645H300	4178.3	329
1700H075	1700H100	1700H150	1700H200	1700H300	4318.0	340

## XH (Extra Heavy Series) 7/8" Pitch (22.225mm)

Width			Pitch Length	Number of Teeth
2" (51 mm) Part Number	3" (75 mm) Part Number	4" (102 mm) Part Number		
507XH200	507XH300	507XH400	1289.1	58
534XH200	534XH300	534XH400	1356.4	61
560XH200	560XH300	560XH400	1422.4	64
630XH200	630XH300	630XH400	1600.2	72
700XH200	700XH300	700XH400	1778.0	80
770XH200	770XH300	770XH400	1955.8	88
840XH200	840XH300	840XH400	2133.6	96
980XH200	980XH300	980XH400	2489.2	112
1120XH200	1120XH300	1120XH400	2844.8	128
1260XH200	1260XH300	1260XH400	3200.4	144
1400XH200	1400XH300	1400XH400	3556.0	160
1540XH200	1540XH300	1540XH400	3911.6	176
1750XH200	1750XH300	1750XH400	4445.0	200

# Curved Tooth Timing Belts

## Challenge Curved Tooth Timing Belts

The special curved tooth design provides improved power transmission in a wide range of industrial applications. The precision formed teeth ensure smooth engagement with pulley grooves ensuring a long trouble free service life.

3M and 5M pitch belts are especially suited for many domestic, office machinery and power tool applications.

8M and 14M pitch belts are widely used in high performance drive applications.

### Belt Dimensions

	3M	5M	8M	14M
Belt Pitch (P)	3.00	5.00	8.00	14.00
Tooth Depth (T)	1.15	2.00	3.20	6.00
Belt Thickness (H)	2.40	3.80	5.40	9.70

### Curved Tooth, 3mm Pitch

Width			Number of Teeth
6mm Part Number	9mm Part Number	15mm Part Number	
90-3M-6	90-3M-9	90-3M-15	30
105-3M-6	105-3M-9	105-3M-15	35
129-3M-6	129-3M-9	129-3M-15	43
141-3M-6	141-3M-9	141-3M-15	47
144-3M-6	144-3M-9	144-3M-15	48
147-3M-6	147-3M-9	147-3M-15	49
150-3M-6	150-3M-9	150-3M-15	50
159-3M-6	159-3M-9	159-3M-15	53
168-3M-6	168-3M-9	168-3M-15	56
174-3M-6	174-3M-9	174-3M-15	58
177-3M-6	177-3M-9	177-3M-15	59
180-3M-6	180-3M-9	180-3M-15	60
186-3M-6	186-3M-9	186-3M-15	62
195-3M-6	195-3M-9	195-3M-15	65
201-3M-6	201-3M-9	201-3M-15	67
204-3M-6	204-3M-9	204-3M-15	68
210-3M-6	210-3M-9	210-3M-15	70
213-3M-6	213-3M-9	213-3M-15	71
225-3M-6	225-3M-9	225-3M-15	75
231-3M-6	231-3M-9	231-3M-15	77
240-3M-6	240-3M-9	240-3M-15	80
243-3M-6	243-3M-9	243-3M-15	81
246-3M-6	246-3M-9	246-3M-15	82
249-3M-6	249-3M-9	249-3M-15	83
252-3M-6	252-3M-9	252-3M-15	84
255-3M-6	255-3M-9	255-3M-15	85
261-3M-6	261-3M-9	261-3M-15	87
264-3M-6	264-3M-9	264-3M-15	88
267-3M-6	267-3M-9	267-3M-15	89
270-3M-6	270-3M-9	270-3M-15	90
276-3M-6	276-3M-9	276-3M-15	92
285-3M-6	285-3M-9	285-3M-15	95
288-3M-6	288-3M-9	288-3M-15	96
291-3M-6	291-3M-9	291-3M-15	97
297-3M-6	297-3M-9	297-3M-15	99
300-3M-6	300-3M-9	300-3M-15	100
312-3M-6	312-3M-9	312-3M-15	104
318-3M-6	318-3M-9	318-3M-15	106
327-3M-6	327-3M-9	327-3M-15	109
330-3M-6	330-3M-9	330-3M-15	110
333-3M-6	333-3M-9	333-3M-15	111
336-3M-6	336-3M-9	336-3M-15	112
339-3M-6	339-3M-9	339-3M-15	113

Width			Number of Teeth
6mm Part Number	9mm Part Number	15mm Part Number	
345-3M-6	345-3M-9	345-3M-15	115
357-3M-6	357-3M-9	357-3M-15	119
363-3M-6	363-3M-9	363-3M-15	121
375-3M-6	375-3M-9	375-3M-15	125
384-3M-6	384-3M-9	384-3M-15	128
390-3M-6	390-3M-9	390-3M-15	130
393-3M-6	393-3M-9	393-3M-15	131
405-3M-6	405-3M-9	405-3M-15	135
420-3M-6	420-3M-9	420-3M-15	140
432-3M-6	432-3M-9	432-3M-15	144
447-3M-6	447-3M-9	447-3M-15	149
474-3M-6	474-3M-9	474-3M-15	158
480-3M-6	480-3M-9	480-3M-15	160
486-3M-6	486-3M-9	486-3M-15	162
489-3M-6	489-3M-9	489-3M-15	163
501-3M-6	501-3M-9	501-3M-15	167
510-3M-6	510-3M-9	510-3M-15	170
513-3M-6	513-3M-9	513-3M-15	171
522-3M-6	522-3M-9	522-3M-15	174
531-3M-6	531-3M-9	531-3M-15	177
537-3M-6	537-3M-9	537-3M-15	179
564-3M-6	564-3M-9	564-3M-15	188
570-3M-6	570-3M-9	570-3M-15	190
576-3M-6	576-3M-9	576-3M-15	192
579-3M-6	579-3M-9	579-3M-15	193
597-3M-6	597-3M-9	597-3M-15	199
600-3M-6	600-3M-9	600-3M-15	200
633-3M-6	633-3M-9	633-3M-15	211
648-3M-6	648-3M-9	648-3M-15	216
669-3M-6	669-3M-9	669-3M-15	223
711-3M-6	711-3M-9	711-3M-15	237
735-3M-6	735-3M-9	735-3M-15	245
738-3M-6	738-3M-9	738-3M-15	246
756-3M-6	756-3M-9	756-3M-15	252
804-3M-6	804-3M-9	804-3M-15	268
882-3M-6	882-3M-9	882-3M-15	294
945-3M-6	945-3M-9	945-3M-15	315
1062-3M-6	1062-3M-9	1062-3M-15	354
1125-3M-6	1125-3M-9	1125-3M-15	375
1245-3M-6	1245-3M-9	1245-3M-15	415
1263-3M-6	1263-3M-9	1263-3M-15	421
1500-3M-6	1500-3M-9	1500-3M-15	500
1530-3M-6	1530-3M-9	1530-3M-15	510

All dimensions in millimetres unless otherwise stated. Every effort has been taken to ensure that the data listed in this catalogue is correct. Challenge accepts no liability for any inaccuracies or damage caused.

# Curved Tooth Timing Belts

## Curved Tooth, 5mm Pitch

Width			Number of Teeth
9mm Part Number	15mm Part Number	25mm Part Number	
305-5M-9	305-5M-15	305-5M-25	61
325-5M-9	325-5M-15	325-5M-25	65
345-5M-9	345-5M-15	345-5M-25	69
350-5M-9	350-5M-15	350-5M-25	70
375-5M-9	375-5M-15	375-5M-25	75
400-5M-9	400-5M-15	400-5M-25	80
420-5M-9	420-5M-15	420-5M-25	84
425-5M-9	425-5M-15	425-5M-25	85
450-5M-9	450-5M-15	450-5M-25	90
455-5M-9	455-5M-15	455-5M-25	91
460-5M-9	460-5M-15	460-5M-25	92
465-5M-9	465-5M-15	465-5M-25	93
475-5M-9	475-5M-15	475-5M-25	95
500-5M-9	500-5M-15	500-5M-25	100
525-5M-9	525-5M-15	525-5M-25	105
535-5M-9	535-5M-15	535-5M-25	107
565-5M-9	565-5M-15	565-5M-25	113
575-5M-9	575-5M-15	575-5M-25	115
580-5M-9	580-5M-15	580-5M-25	116
600-5M-9	600-5M-15	600-5M-25	120
610-5M-9	610-5M-15	610-5M-25	122
615-5M-9	615-5M-15	615-5M-25	123
635-5M-9	635-5M-15	635-5M-25	127
640-5M-9	640-5M-15	640-5M-25	128
670-5M-9	670-5M-15	670-5M-25	134
675-5M-9	675-5M-15	675-5M-25	135
700-5M-9	700-5M-15	700-5M-25	140
705-5M-9	705-5M-15	705-5M-25	141
710-5M-9	710-5M-15	710-5M-25	142
725-5M-9	725-5M-15	725-5M-25	145
740-5M-9	740-5M-15	740-5M-25	148

Width			Number of Teeth
9mm Part Number	15mm Part Number	25mm Part Number	
750-5M-9	750-5M-15	750-5M-25	150
755-5M-9	755-5M-15	755-5M-25	151
800-5M-9	800-5M-15	800-5M-25	160
835-5M-9	835-5M-15	835-5M-25	167
850-5M-9	850-5M-15	850-5M-25	170
890-5M-9	890-5M-15	890-5M-25	178
900-5M-9	900-5M-15	900-5M-25	180
935-5M-9	935-5M-15	935-5M-25	187
940-5M-9	940-5M-15	940-5M-25	188
950-5M-9	950-5M-15	950-5M-25	190
980-5M-9	980-5M-15	980-5M-25	196
1000-5M-9	1000-5M-15	1000-5M-25	200
1025-5M-9	1025-5M-15	1025-5M-25	205
1050-5M-9	1050-5M-15	1050-5M-25	210
1100-5M-9	1100-5M-15	1100-5M-25	220
1125-5M-9	1125-5M-15	1125-5M-25	225
1135-5M-9	1135-5M-15	1135-5M-25	227
1195-5M-9	1195-5M-15	1195-5M-25	239
1200-5M-9	1200-5M-15	1200-5M-25	240
1240-5M-9	1240-5M-15	1240-5M-25	248
1270-5M-9	1270-5M-15	1270-5M-25	254
1420-5M-9	1420-5M-15	1420-5M-25	284
1595-5M-9	1595-5M-15	1595-5M-25	319
1690-5M-9	1690-5M-15	1690-5M-25	338
1790-5M-9	1790-5M-15	1790-5M-25	358
1800-5M-9	1800-5M-15	1800-5M-25	360
1870-5M-9	1870-5M-15	1870-5M-25	374
1895-5M-9	1895-5M-15	1895-5M-25	379
1945-5M-9	1945-5M-15	1945-5M-25	389
2000-5M-9	2000-5M-15	2000-5M-25	400

# Curved Tooth Timing Belts

## Curved Tooth, 8mm Pitch

Width				Number of Teeth
20mm Part Number	30mm Part Number	50mm Part Number	85mm Part Number	
480-8M-20	480-8M-30	480-8M-50	480-8M-85	60
536-8M-20	536-8M-30	536-8M-50	536-8M-85	67
544-8M-20	544-8M-30	544-8M-50	544-8M-85	68
560-8M-20	560-8M-30	560-8M-50	560-8M-85	70
600-8M-20	600-8M-30	600-8M-50	600-8M-85	75
608-8M-20	608-8M-30	608-8M-50	608-8M-85	76
632-8M-20	632-8M-30	632-8M-50	632-8M-85	79
640-8M-20	640-8M-30	640-8M-50	640-8M-85	80
680-8M-20	680-8M-30	680-8M-50	680-8M-85	85
720-8M-20	720-8M-30	720-8M-50	720-8M-85	90
800-8M-20	800-8M-30	800-8M-50	800-8M-85	100
840-8M-20	840-8M-30	840-8M-50	840-8M-85	105
880-8M-20	880-8M-30	880-8M-50	880-8M-85	110
896-8M-20	896-8M-30	896-8M-50	896-8M-85	112
920-8M-20	920-8M-30	920-8M-50	920-8M-85	115
960-8M-20	960-8M-30	960-8M-50	960-8M-85	120
1000-8M-20	1000-8M-30	1000-8M-50	1000-8M-85	125
1040-8M-20	1040-8M-30	1040-8M-50	1040-8M-85	130
1080-8M-20	1080-8M-30	1080-8M-50	1080-8M-85	135
1120-8M-20	1120-8M-30	1120-8M-50	1120-8M-85	140
1200-8M-20	1200-8M-30	1200-8M-50	1200-8M-85	150
1224-8M-20	1224-8M-30	1224-8M-50	1224-8M-85	153
1280-8M-20	1280-8M-30	1280-8M-50	1280-8M-85	160
1352-8M-20	1352-8M-30	1352-8M-50	1352-8M-85	169
1440-8M-20	1440-8M-30	1440-8M-50	1440-8M-85	180
1464-8M-20	1464-8M-30	1464-8M-50	1464-8M-85	183
1600-8M-20	1600-8M-30	1600-8M-50	1600-8M-85	200
1760-8M-20	1760-8M-30	1760-8M-50	1760-8M-85	220
1800-8M-20	1800-8M-30	1800-8M-50	1800-8M-85	225
2000-8M-20	2000-8M-30	2000-8M-50	2000-8M-85	250
2200-8M-20	2200-8M-30	2200-8M-50	2200-8M-85	275
2400-8M-20	2400-8M-30	2400-8M-50	2400-8M-85	300
2520-8M-20	2520-8M-30	2520-8M-50	2520-8M-85	315
2600-8M-20	2600-8M-30	2600-8M-50	2600-8M-85	325
2800-8M-20	2800-8M-30	2800-8M-50	2800-8M-85	350

# Curved Tooth Timing Belts

## Curved Tooth, 14mm Pitch

Width					Number of Teeth
40mm Part Number	55mm Part Number	85mm Part Number	115mm Part Number	170mm Part Number	
966-14M-40	966-14M-55	966-14M-85	966-14M-115	966-14M-170	69
994-14M-40	994-14M-55	994-14M-85	994-14M-115	994-14M-170	71
1092-14M-40	1092-14M-55	1092-14M-85	1092-14M-115	1092-14M-170	78
1106-14M-40	1106-14M-55	1106-14M-85	1106-14M-115	1106-14M-170	79
1190-14M-40	1190-14M-55	1190-14M-85	1190-14M-115	1190-14M-170	85
1260-14M-40	1260-14M-55	1260-14M-85	1260-14M-115	1260-14M-170	90
1288-14M-40	1288-14M-55	1288-14M-85	1288-14M-115	1288-14M-170	92
1344-14M-40	1344-14M-55	1344-14M-85	1344-14M-115	1344-14M-170	96
1400-14M-40	1400-14M-55	1400-14M-85	1400-14M-115	1400-14M-170	100
1442-14M-40	1442-14M-55	1442-14M-85	1442-14M-115	1442-14M-170	103
1568-14M-40	1568-14M-55	1568-14M-85	1568-14M-115	1568-14M-170	112
1610-14M-40	1610-14M-55	1610-14M-85	1610-14M-115	1610-14M-170	115
1764-14M-40	1764-14M-55	1764-14M-85	1764-14M-115	1764-14M-170	126
1778-14M-40	1778-14M-55	1778-14M-85	1778-14M-115	1778-14M-170	127
1848-14M-40	1848-14M-55	1848-14M-85	1848-14M-115	1848-14M-170	132
1890-14M-40	1890-14M-55	1890-14M-85	1890-14M-115	1890-14M-170	135
1904-14M-40	1904-14M-55	1904-14M-85	1904-14M-115	1904-14M-170	136
1960-14M-40	1960-14M-55	1960-14M-85	1960-14M-115	1960-14M-170	140
2100-14M-40	2100-14M-55	2100-14M-85	2100-14M-115	2100-14M-170	150
2240-14M-40	2240-14M-55	2240-14M-85	2240-14M-115	2240-14M-170	160
2310-14M-40	2310-14M-55	2310-14M-85	2310-14M-115	2310-14M-170	165
2380-14M-40	2380-14M-55	2380-14M-85	2380-14M-115	2380-14M-170	170
2450-14M-40	2450-14M-55	2450-14M-85	2450-14M-115	2450-14M-170	175
2590-14M-40	2590-14M-55	2590-14M-85	2590-14M-115	2590-14M-170	185
2660-14M-40	2660-14M-55	2660-14M-85	2660-14M-115	2660-14M-170	190
2800-14M-40	2800-14M-55	2800-14M-85	2800-14M-115	2800-14M-170	200
3150-14M-40	3150-14M-55	3150-14M-85	3150-14M-115	3150-14M-170	225
3360-14M-40	3360-14M-55	3360-14M-85	3360-14M-115	3360-14M-170	240
3500-14M-40	3500-14M-55	3500-14M-85	3500-14M-115	3500-14M-170	250
3850-14M-40	3850-14M-55	3850-14M-85	3850-14M-115	3850-14M-170	275
3920-14M-40	3920-14M-55	3920-14M-85	3920-14M-115	3920-14M-170	280
4326-14M-40	4326-14M-55	4326-14M-85	4326-14M-115	4326-14M-170	309
4578-14M-40	4578-14M-55	4578-14M-85	4578-14M-115	4578-14M-170	327



