


Single Rockers

**AS-P /
AS-PV**

for flange
fixation


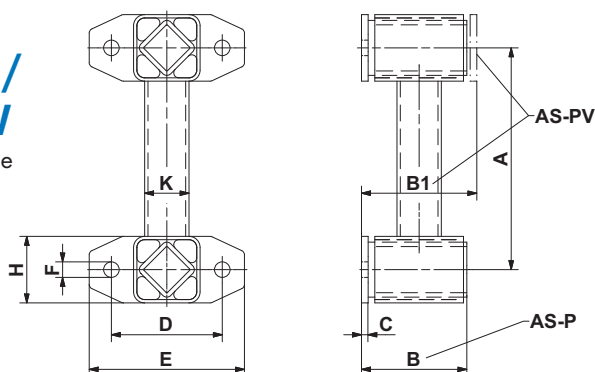


Type AS-PV with inverted flange

Art. No.	Type	G [N] K<2	Cd [N/mm]	A	B	B1	C	D	E	øF	H	øK	Weight [kg]	Material structure
07 081 001	AS-P 15	100	5	100	50	—	4	50	70	7	25	18	0.5	Steel welded constructions, ROSTA blue painted
07 091 001	AS-PV 15				—	56								
07 081 002	AS-P 18	200	11	120	62	—	5	60	85	9.5	35	24	0.8	
07 091 002	AS-PV 18				—	68								
07 081 003	AS-P 27	400	12	160	73	—	5	80	110	11.5	45	34	1.4	
07 091 003	AS-PV 27				—	80								
07 081 004	AS-P 38	800	19	200	95	—	6	100	140	14	60	40	3.6	
07 091 004	AS-PV 38				—	104								
07 081 005	AS-P 45	1'600	33	200	120	—	8	130	180	18	70	45	5.5	
07 091 005	AS-PV 45				—	132								
07 081 006	AS-P 50	2'500	37	250	145	—	10	140	190	18	80	60	8.3	
07 091 006	AS-PV 50				—	160								

AS-C

for frictional
center connection

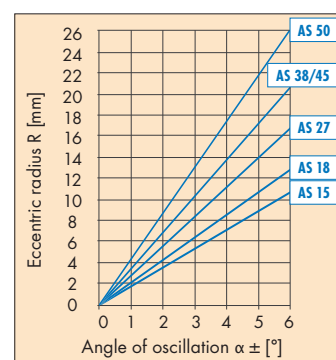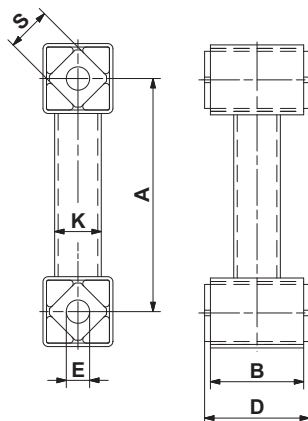

Art. No.	Type	G [N] K<2	Cd [N/mm]	A	B	D _{-0.3} ⁰	øE _{-0.2} ^{+0.4}	øK	□S	Weight [kg]	Material structure	
											Inner square	Housing
07 071 001	AS-C 15	100	5	100	40	45	10 _{-0.2} ^{+0.4}	18	15	0.4	Light metal profile	Steel welded construction, ROSTA blue painted
07 071 002	AS-C 18	200	11	120	50	55	13 _{-0.2} ⁰	24	18	0.6		
07 071 003	AS-C 27	400	12	160	60	65	16 _{-0.3} ^{+0.5}	34	27	1.3		
07 071 004	AS-C 38	800	19	200	80	90	20 _{-0.2} ^{+0.5}	40	38	2.6		
07 071 005	AS-C 45	1'600	33	200	100	110	24 _{-0.2} ^{+0.5}	45	45	3.9		
07 071 006	AS-C 50	2'500	37	250	120	130	30 _{-0.2} ^{+0.5}	60	50	6.1		