

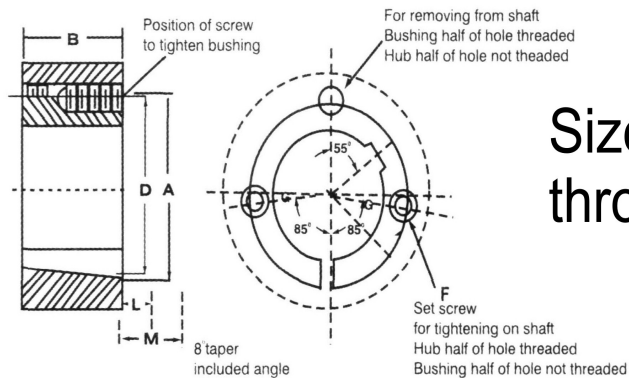


TaperBush


Stock Item Up to size 5050

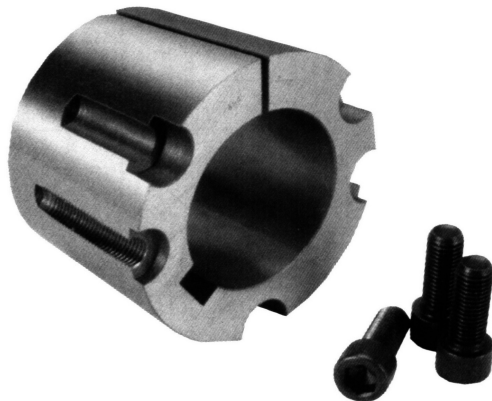

Size 1008
through 3030

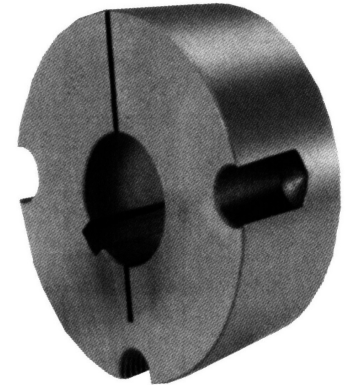

Sizes 3525 through 5050

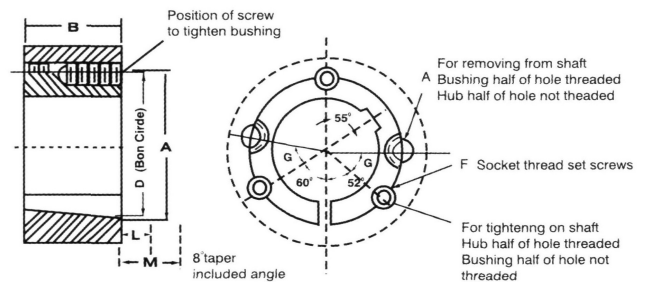

Size	A. Max OD. mm.	B. Length mm.	D. BCD. mm.	Screw BSW x L. inch	Number of Screw	Available finished bore with ISO Standard Keyway mm.
1008	35.2	22.2	33.7	1/4 x 1/2	2	9 10 14 19
1108	38.4	22.2	36.9	1/4 x 1/2	2	12 14 19
1210	47.6	25.4	44.5	3/8 x 5/8	2	12 14 19 20 22 24 28 30
1215	47.6	38.1	44.5	3/8 x 5/8	2	14 19 24 28
1310	50.8	25.4	47.6	3/8 x 5/8	2	14 19 24 28 32
1610	57.2	25.4	54.0	3/8 x 5/8	2	14 19 20 22 24 28 30 32 38
1615	57.2	38.1	54.0	3/8 x 5/8	2	24 28 32 38
2012	69.9	31.8	66.7	1/16 x 7/8	2	19 24 25 28 30 32 38 40 42 48
2517	85.7	44.5	82.6	1/2 x 1	2	24 25 28 30 32 38 40 42 48 50 55 60
2525	85.7	63.5	82.6	1/2 x 1	2	32 38 48 50 55 60
3020	108.0	50.8	101.6	5/8 x 1 1/4	2	38 40 42 48 50 55 60 65 70 75
3030	108.0	76.2	101.6	5/8 x 1 1/4	2	38 40 42 48 50 55 60 65 70 75
3525	127.0	63.5	123.0	1/2 x 1 1/2	3	38 40 42 48 50 55 60 65 70 75
3535	127.0	89.0	123.0	1/2 x 1 1/2	3	60 65 70 75 80 85
4030	146.0	76.2	141.0	5/8 x 1 3/4	3	Reborable to suite actual diameter of shaft
4040	146.0	102.0	141.0	5/8 x 1 3/4	3	Reborable to suite actual diameter of shaft
4535	161.0	89.0	156.0	3/4 x 2	3	Reborable to suite actual diameter of shaft
4545	161.0	114.0	156.0	3/4 x 2	3	Reborable to suite actual diameter of shaft
5040	178.0	101.6	171.0	7/8 x 2 1/4	3	Reborable to suite actual diameter of shaft
5050	178.0	127.0	171.0	7/8 x 2 1/4	3	Reborable to suite actual diameter of shaft
6050	235.0	127.0	228.6	1 1/4 x 3 1/2	3	Reborable to suite actual diameter of shaft
7060	260.4	152.4	254.0	1 1/4 x 3 1/2	4	Reborable to suite actual diameter of shaft